

Conceptual Model for the High Plains Aquifer GAM

Stakeholder Advisory Forum #2
Lubbock, TX

Presented By:




May 14, 2014

Today's Topics

- Introduction to the Groundwater Availability Modeling program (Cindy Ridgeway, TWDB)
- Conceptual Model for the High Plains Aquifer System
- Demonstration of the High Plains Aquifer System conceptual model viewer (in beta)

Groundwater Availability Modeling

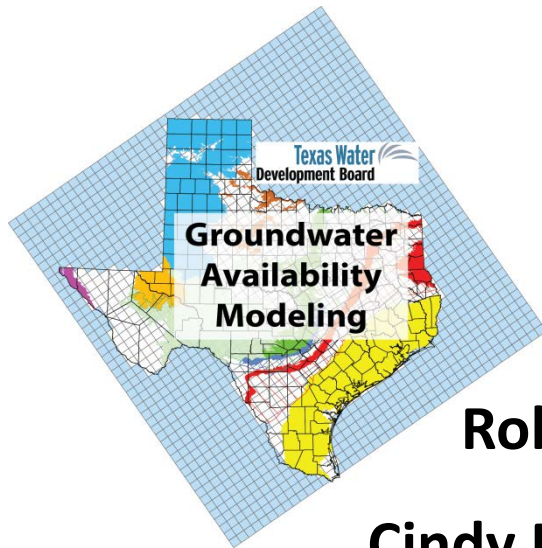

Rohit Goswami, Hydrologist

Cindy Ridgeway, Contract Manager

High Plains Aquifer System Groundwater Availability Model (GAM)

Texas Water Development Board

Disclaimer


The statements contained in this presentation are my current views and opinions and are not intended to reflect the positions of, or information from, the Texas Water Development Board, nor is it an indication of any official policy position of the Board.

GAM Program

- * **Purpose:** to develop tools that can be used to help GCDs, RWPGs, and others understand and manage their groundwater resources.
- * **Public process:** you get to see how the model is put together.
- * **Freely available:** models are standardized, thoroughly documented. Reports available over the internet.
- * **Living tools:** periodically updated.

What is Groundwater Availability?


Policy + **Science** = **Groundwater Availability**




Desired Future Conditions + **GAM or other tool** = **Modeled Available Groundwater**

Goal: informed decision-making


Groundwater Model

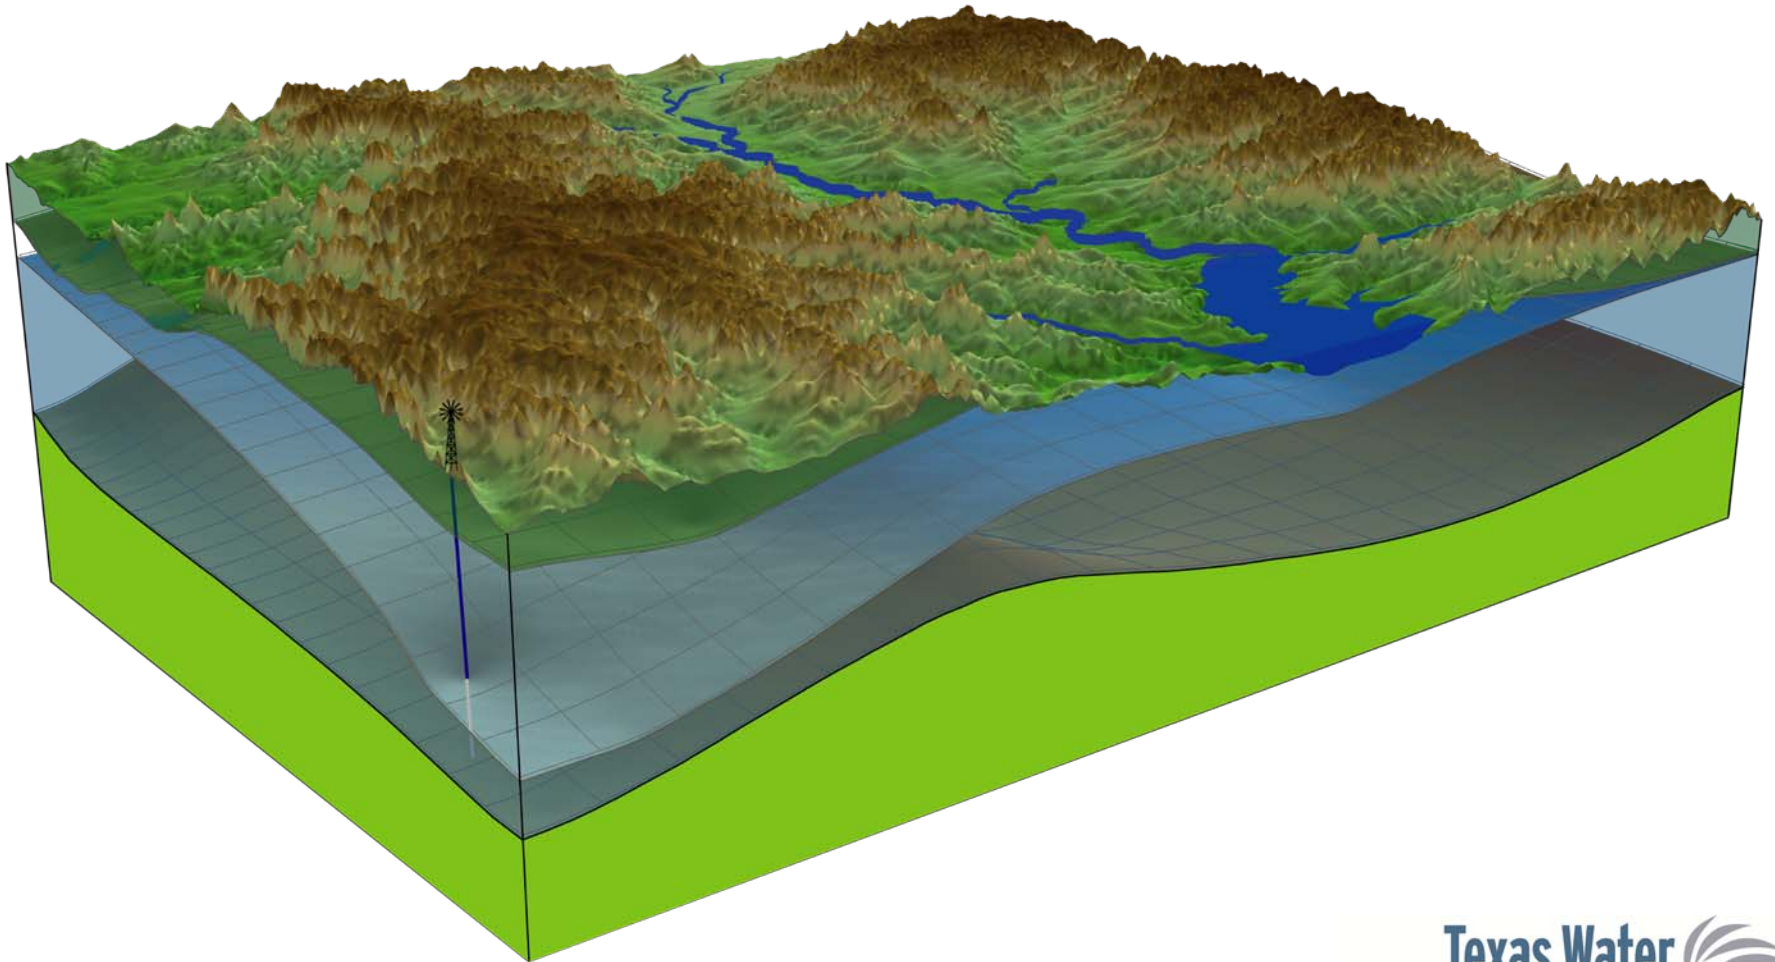

Major Aquifers

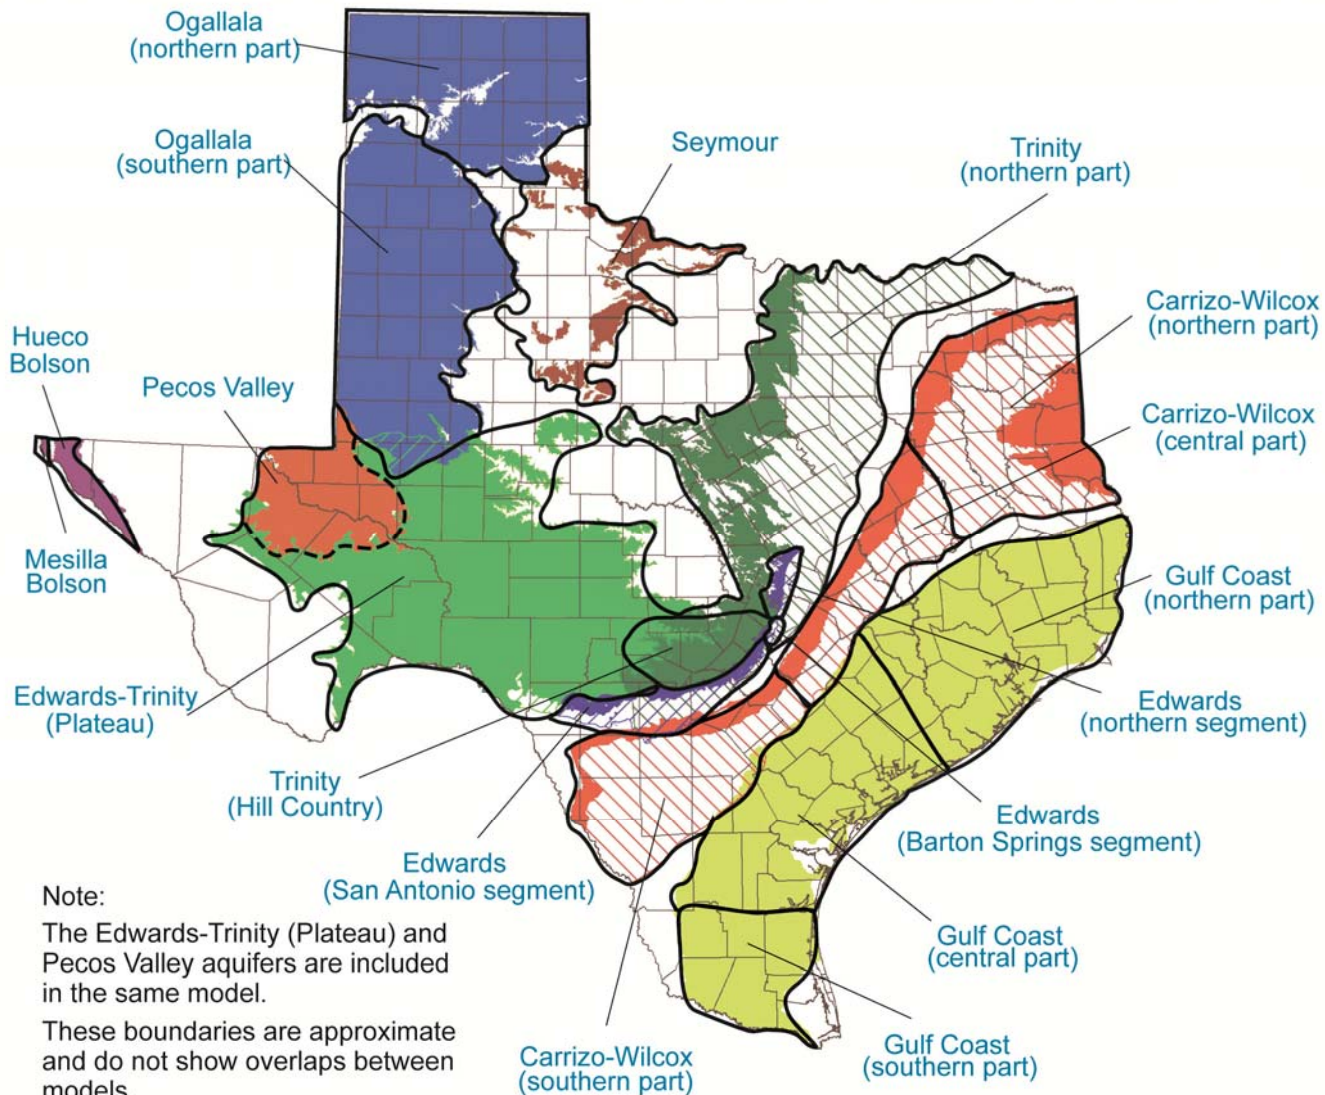

Minor Aquifers

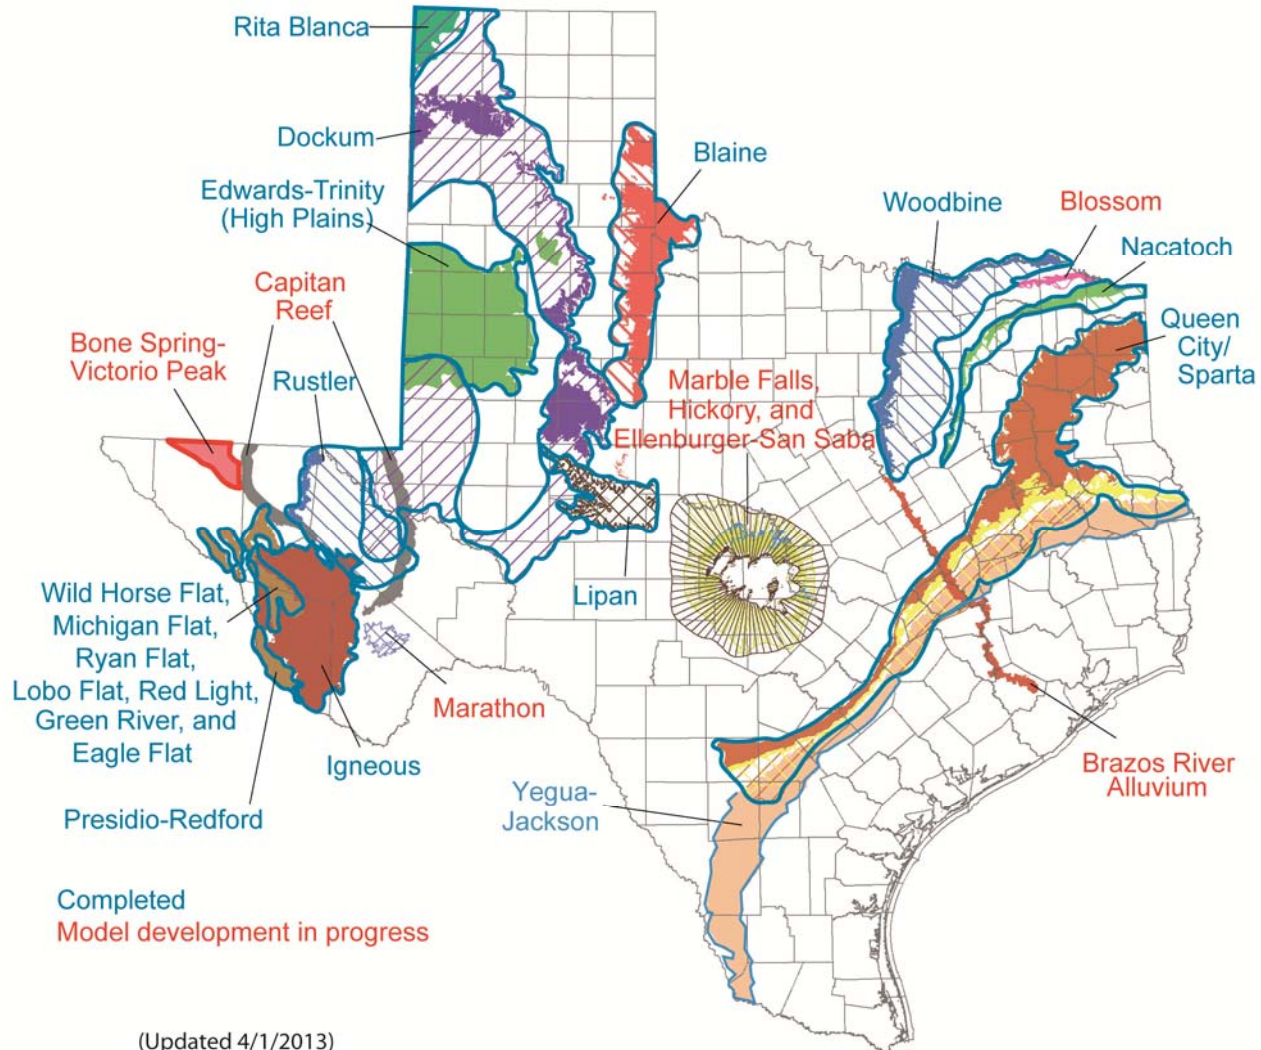

How we use Groundwater Models




* Texas Water Code, § 36.1071 (h)

Inform groundwater districts about historical conditions in the aquifer

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Edwards-Trinity (Plateau) Aquifer	140,509
	Pecos Valley Aquifer	14,115
	Dockum Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Edwards-Trinity (Plateau) Aquifer	31,222
	Pecos Valley Aquifer	9,804
	Dockum Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Edwards-Trinity (Plateau) Aquifer	32,993
	Pecos Valley Aquifer	3,441
	Dockum Aquifer	554

How we use Groundwater Models


* Texas Water Code, § 36.108 (d): Assist districts and management areas in determining desired future conditions

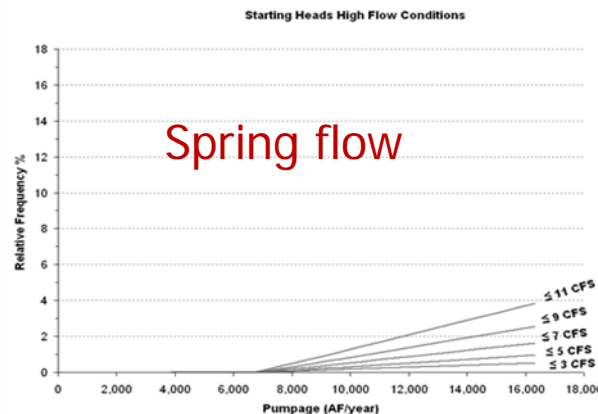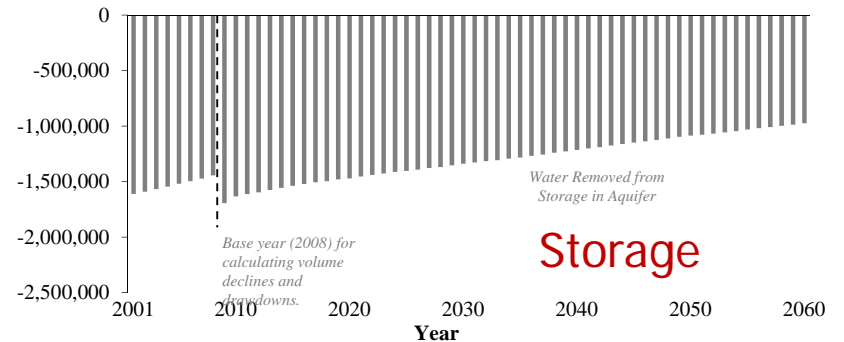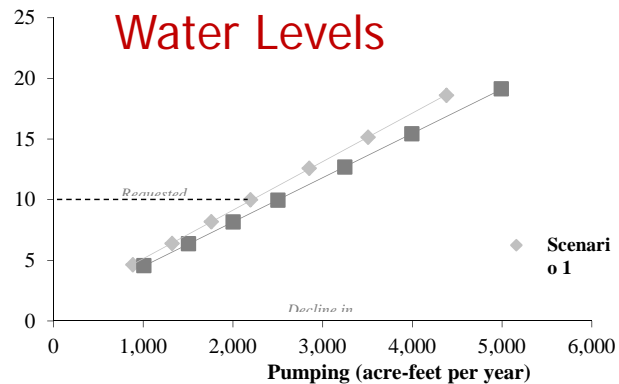

How we use Groundwater Models

- * Texas Water Code, § 36.1084 (b): Develop modeled available groundwater based on desired future conditions


County	Regional Water Planning Area	Basin	Year					
			2010	2020	2030	2040	2050	2060
Hudspeth	E	Rio Grande	101,429	101,429	101,429	101,429	101,429	101,429

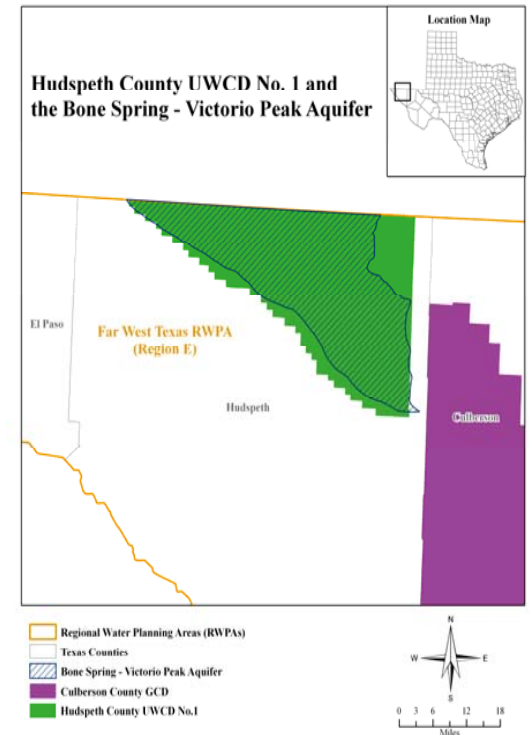

How we use Groundwater Models

* Texas Water Code, § 36.108 (d) (3)


Estimating total recoverable storage for explanatory reports

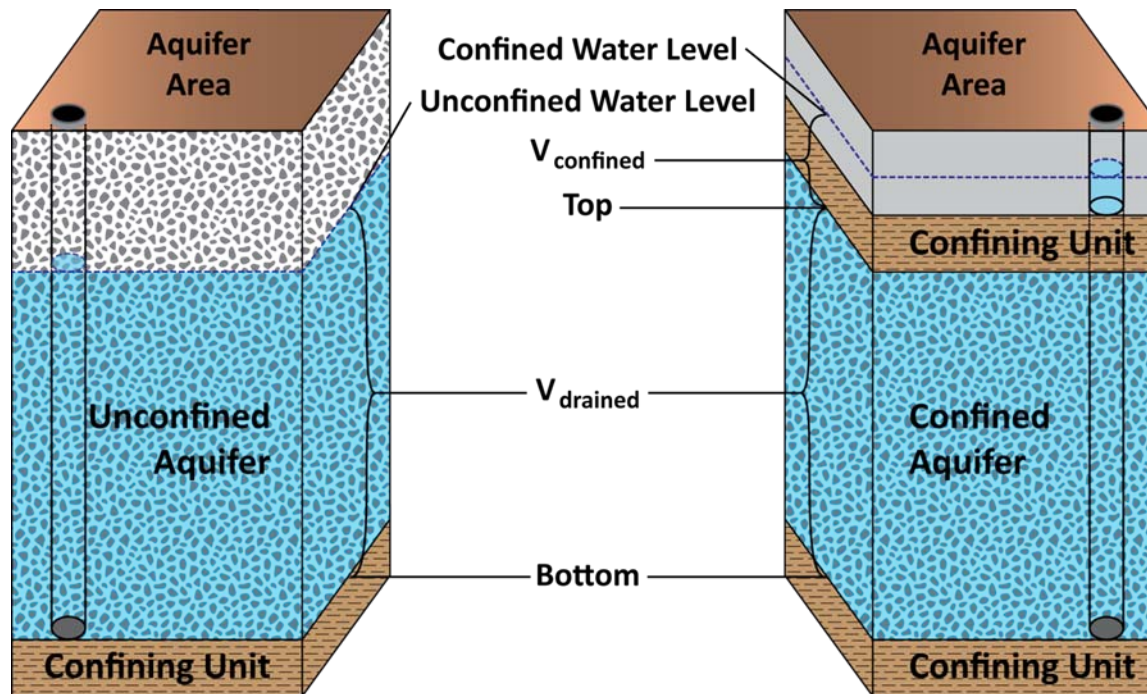

Stakeholder Advisory Forums

- * Keep updated about progress of the model**
- * Understand how the groundwater model can, should, and should not be used**
- * Provide input and data to assist with model development**

Contact Information

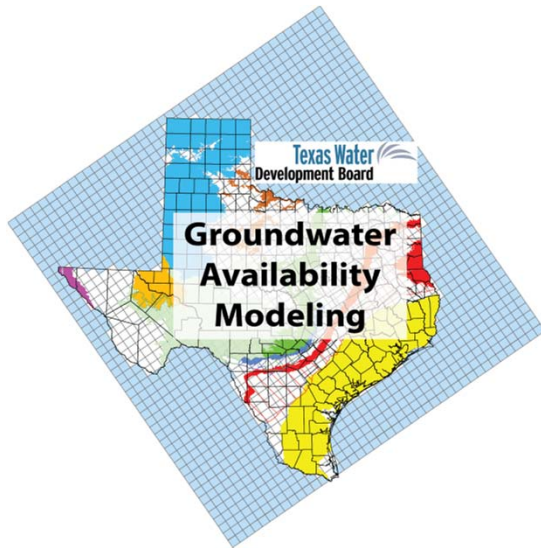

Cindy Ridgeway, P.G.
Cindy.Ridgeway@twdb.texas.gov
512-936-2386

Texas Water Development Board
1700 North Congress Avenue
P.O. Box 13231
Austin, Texas 78711-3231

Web information:

<http://www.twdb.texas.gov/groundwater/models/gam/hpas/hpas.asp#saf>

<http://www.twdb.texas.gov/groundwater/index.asp>



Key Aspects of Conceptualization

The **Conceptual Model** is a simplified description of the various hydrogeologic and structural components of an aquifer system and their interactions.

- Extent and hydrostratigraphy
- Structure*
- Hydraulic/storage properties
- Recharge/discharge*
- Groundwater production*
- Cross-formational flow
- Water quality

*Additional financial support from HPWD, NPGCD, and PGCD allowed increased analyses in these areas of the conceptual model, in addition to enhanced data visualization and additional stakeholder meetings

Study Area

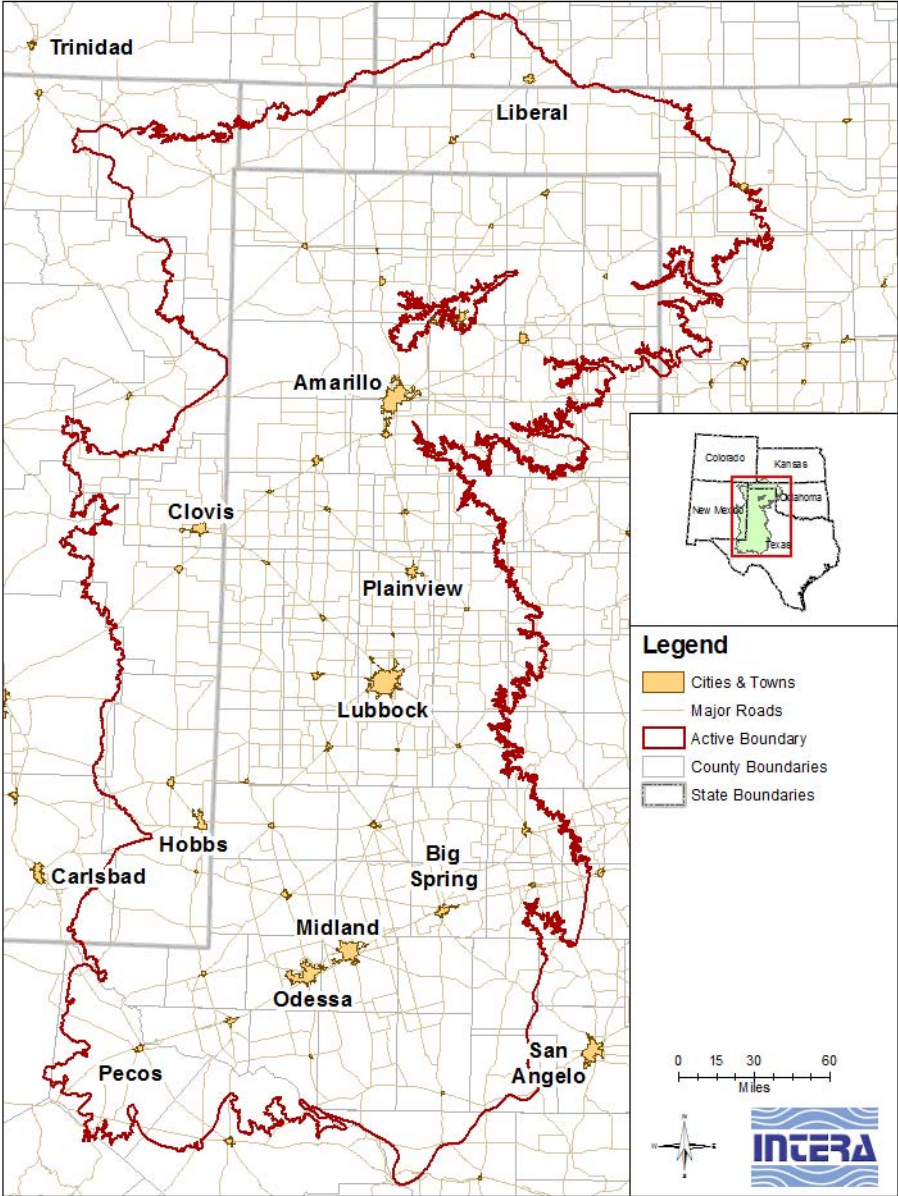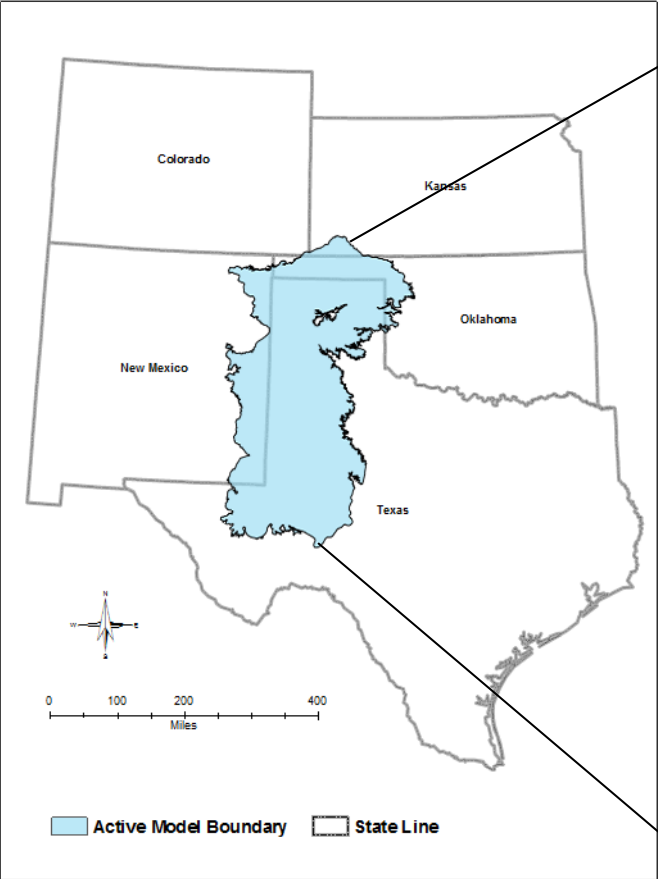


Extent and Hydrostratigraphy

System	Formation		Aquifer	Model Layer		
				North	Central	South
Quaternary	Pecos Valley Alluvium		Pecos Valley			1
Tertiary	Ogallala		Ogallala	1	1	
Cretaceous	Duck Creek	Boracho [‡]	Edwards-Trinity		2	2 [‡]
	Kiamichi	Finlay [‡]				
	Edwards					
	Comanche Peak					
	Walnut					
Antlers						
Jurassic	Morrison	Rita Blanca	2			
	Exeter					
Triassic	Cooper Canyon	Upper Dockum		3	3	
	Trujillo					
	Tecovas	Lower Dockum	4	4	4	
	Santa Rosa					
Permian	Dewey Lake		No Flow			
	Rustler	Rustler				

^{||} Edwards-Trinity (High Plains) Aquifer represented by layer 2 in the central portion of the domain.

[‡] Edwards-Trinity (Plateau) Aquifer represented by layer 2 in the southern portion of the domain.

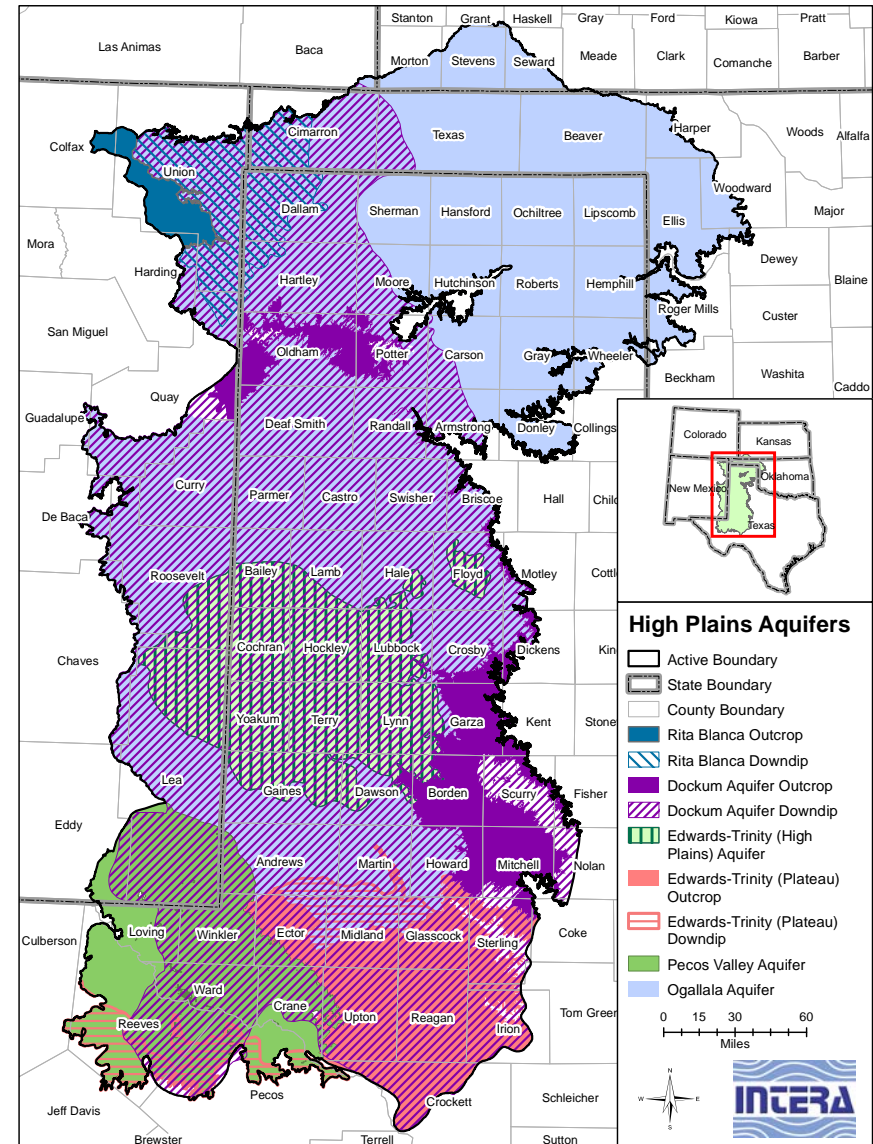

Structure

- Correlation based on 2,050 geophysical logs retrieved from:




BRACS database	BEG Geophysical Log Facility
commercial suppliers	Railroad Commission
UT Lands Office	NM Oil Conservation Division
City of Amarillo	City of Canyon

- Secondary information from driller's logs, cores, and previous studies
 - Use for "infilling"
 - Added detail in inter-geophysical log areas


- Lithology based on calibrated gamma ray logs.

- Additional District funding allowed significant increase in geophysical log resolution and improved detail in surface creation.



Structural Correlations

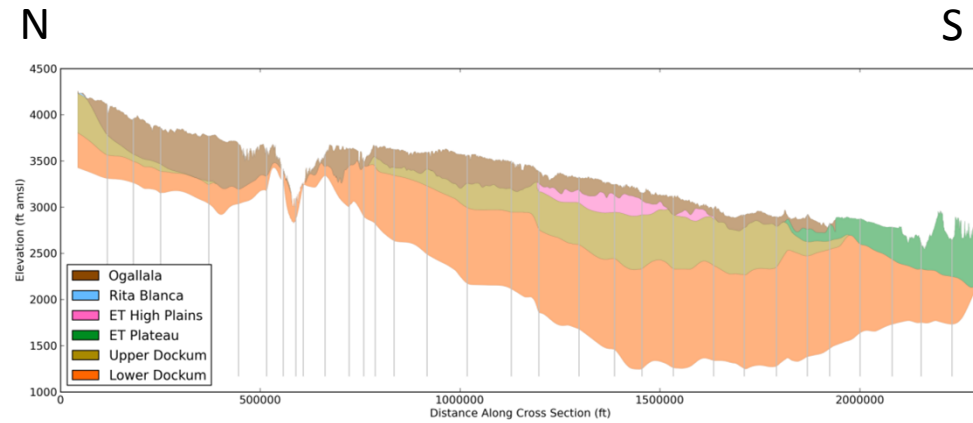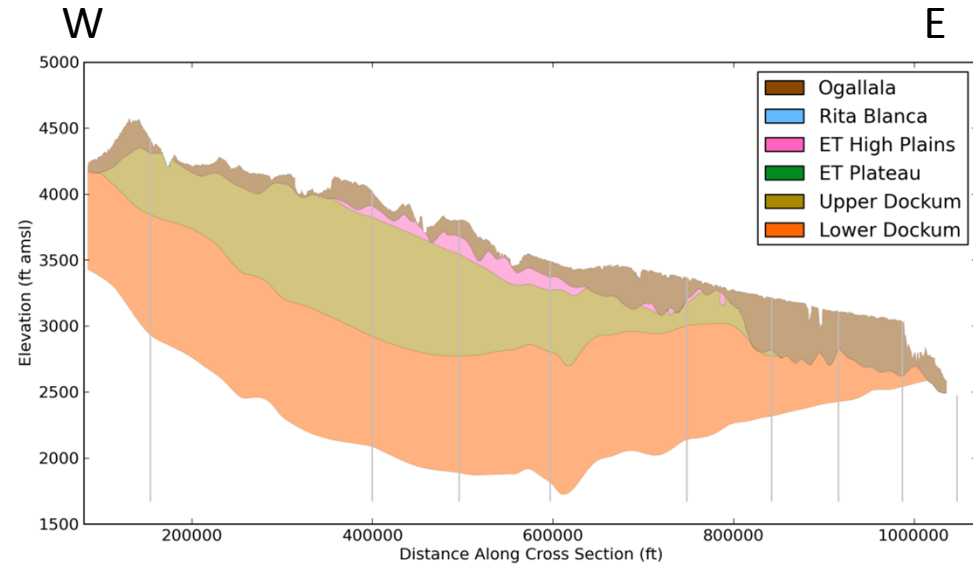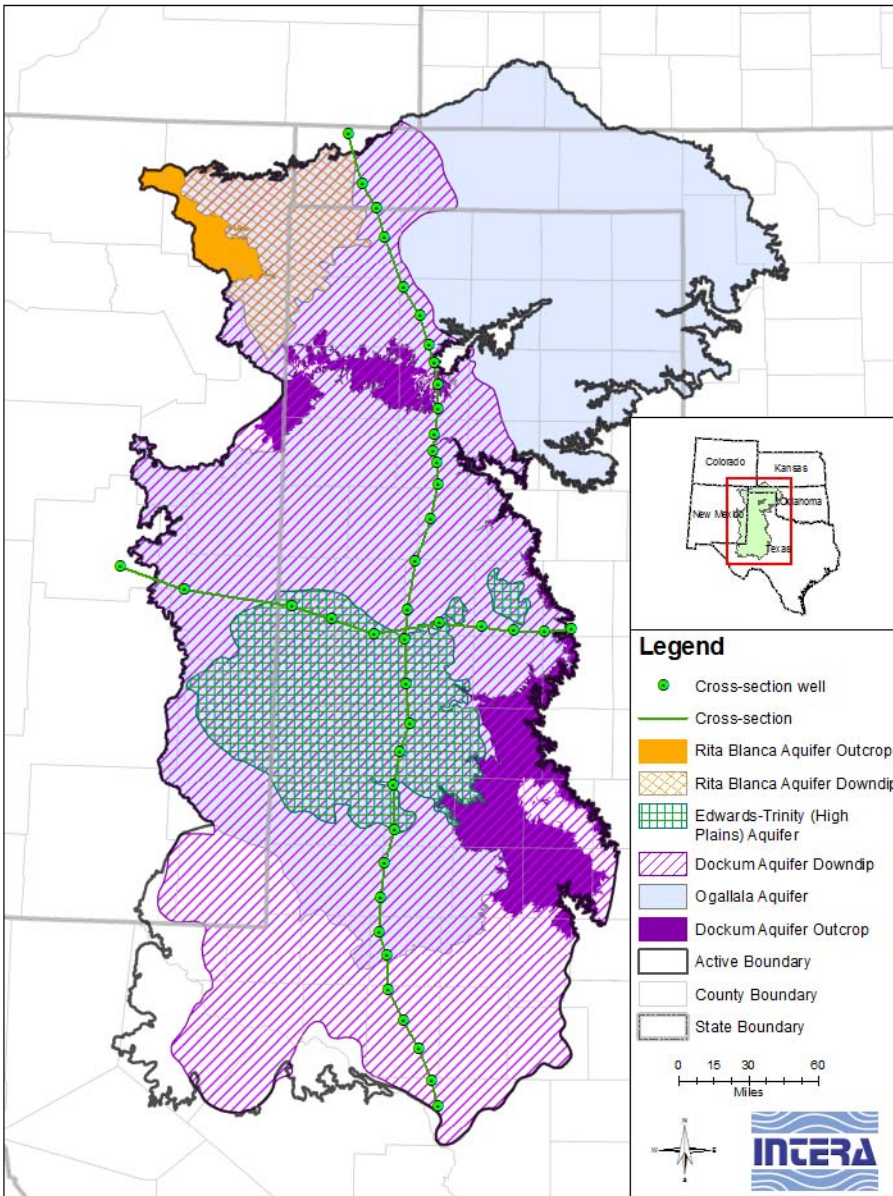

Lithologic Cross Section

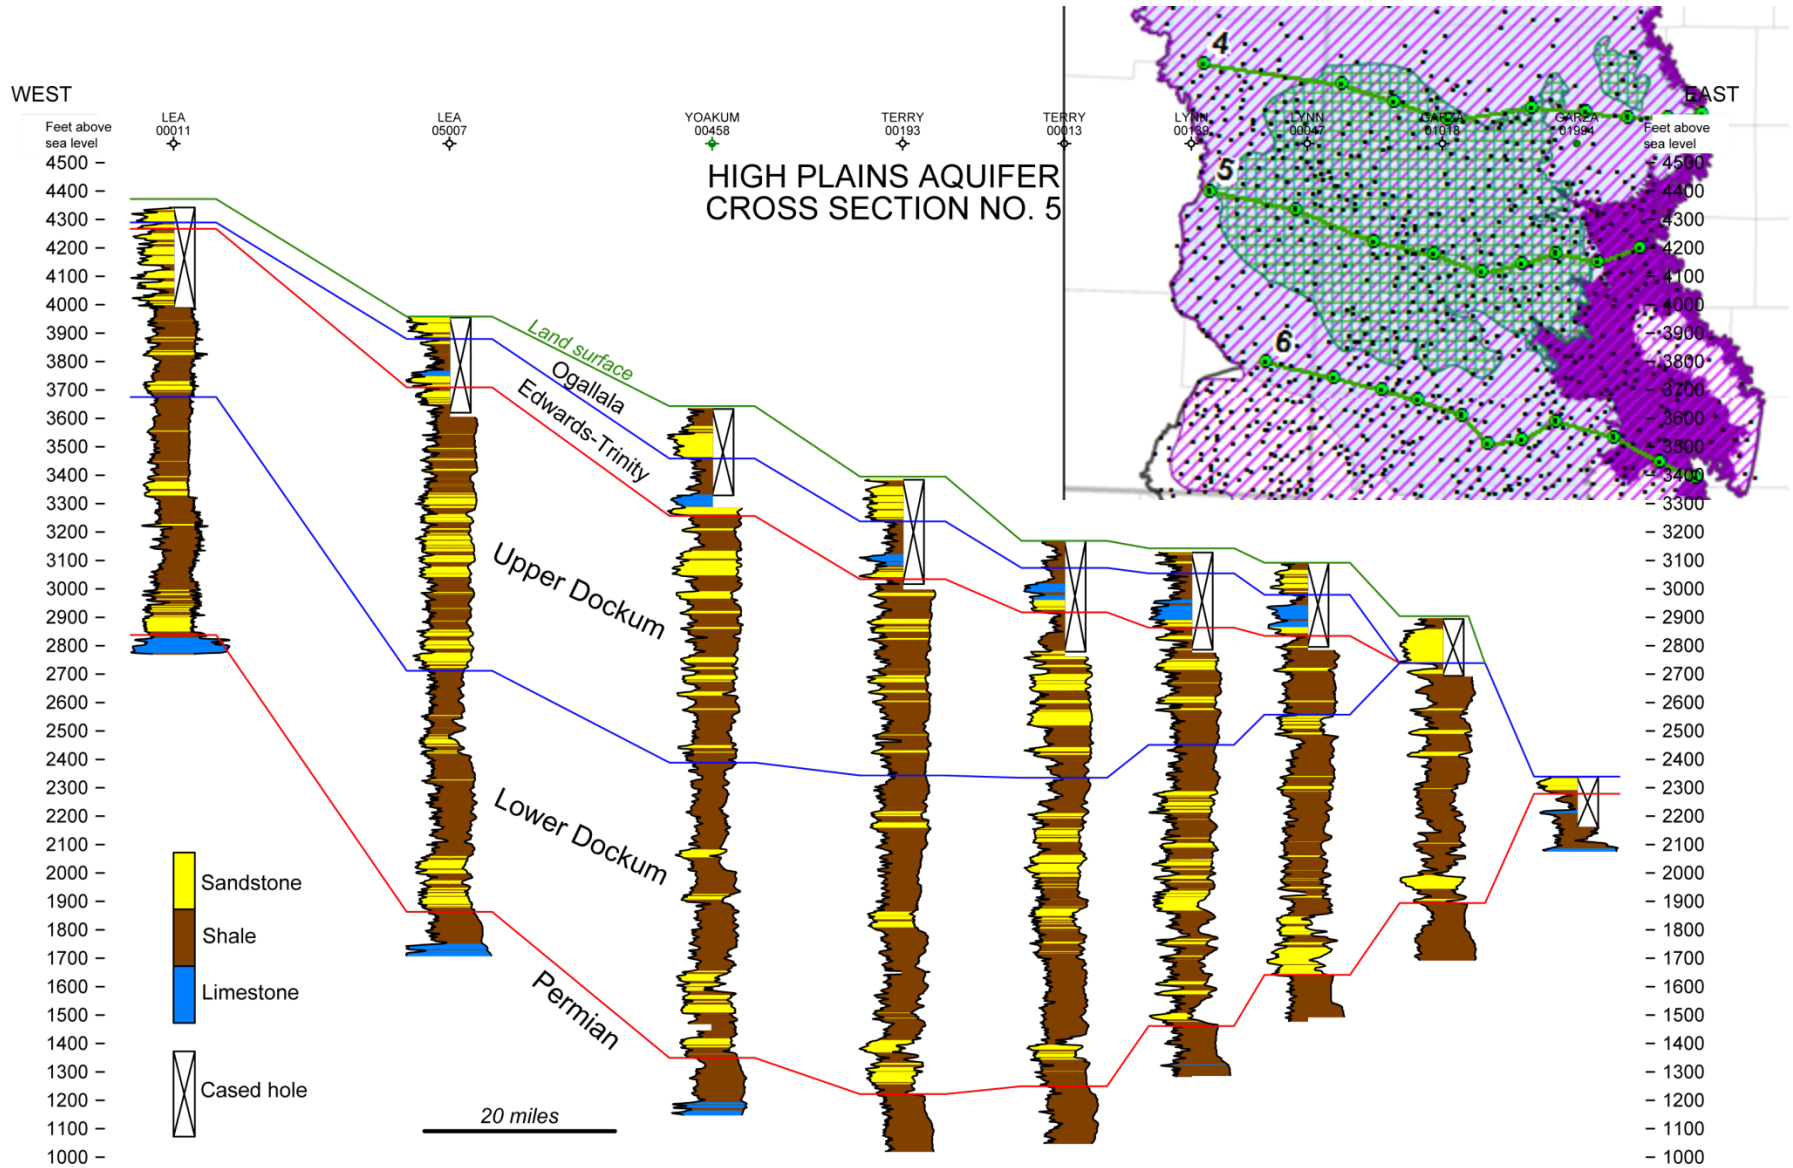



Lithology Estimates

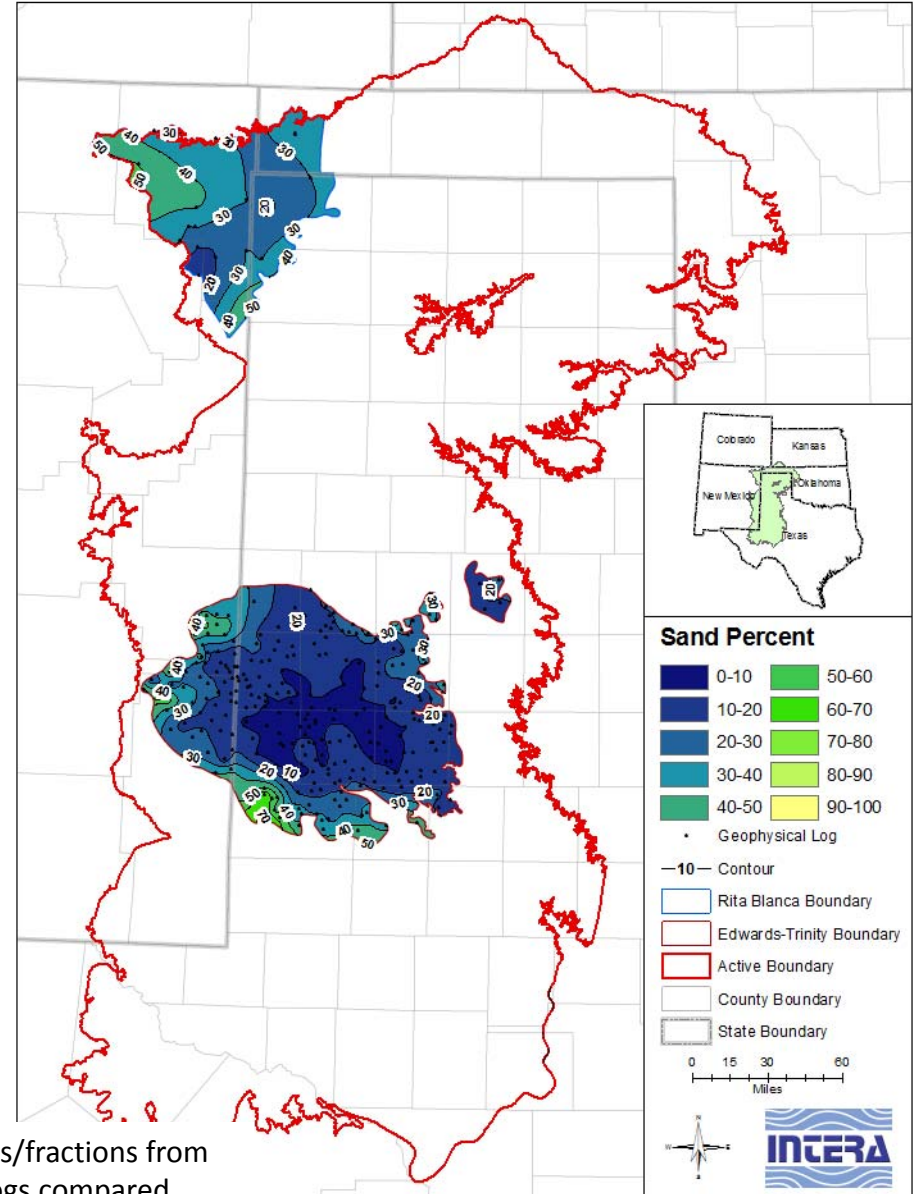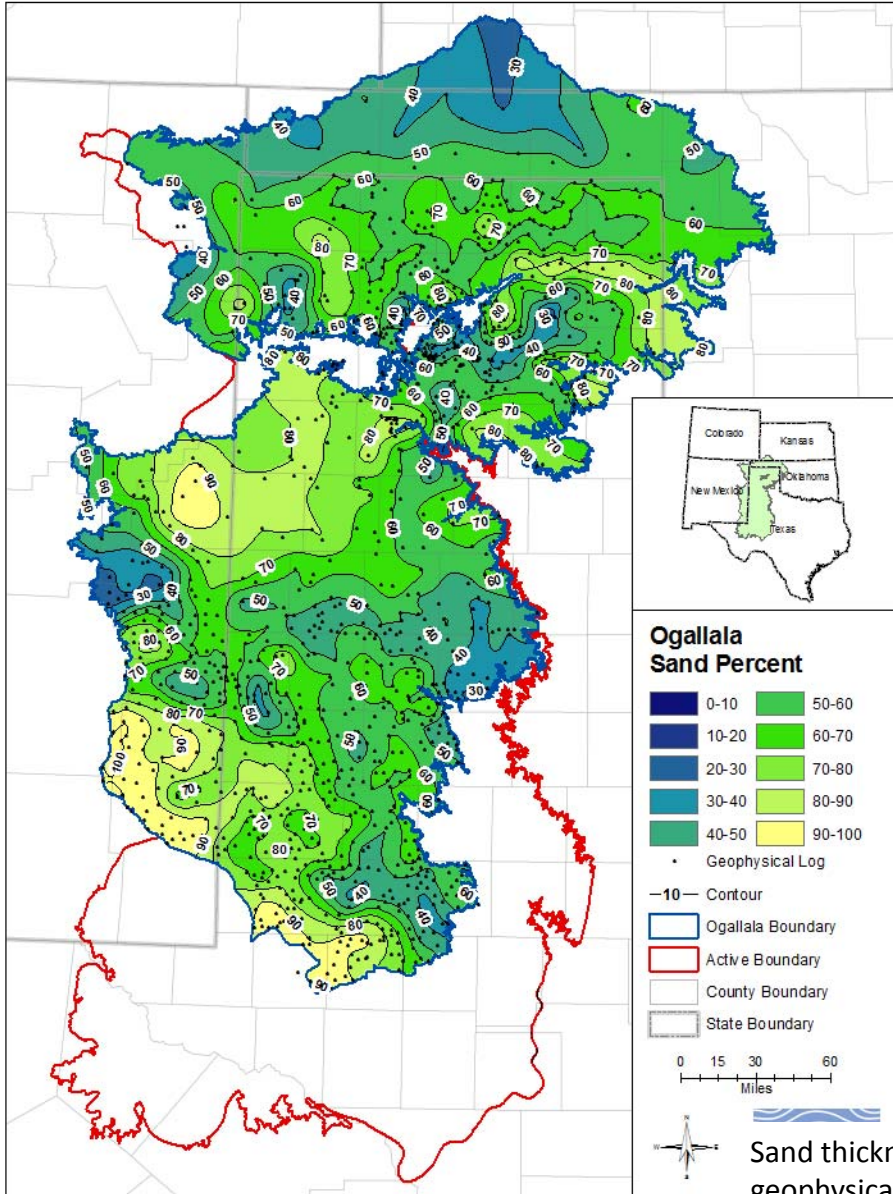

Sand thickness/fractions from geophysical logs compared favorably to previous studies




Lithology Estimates

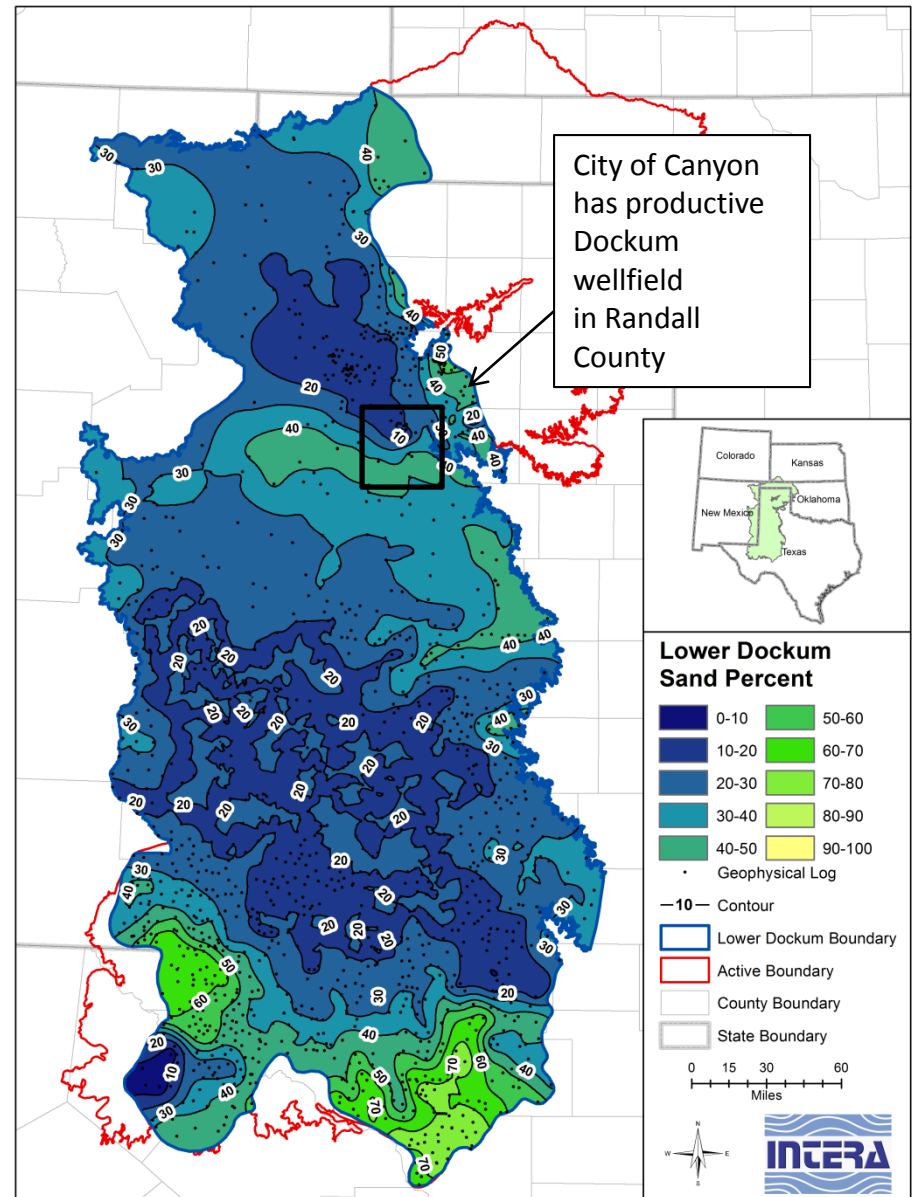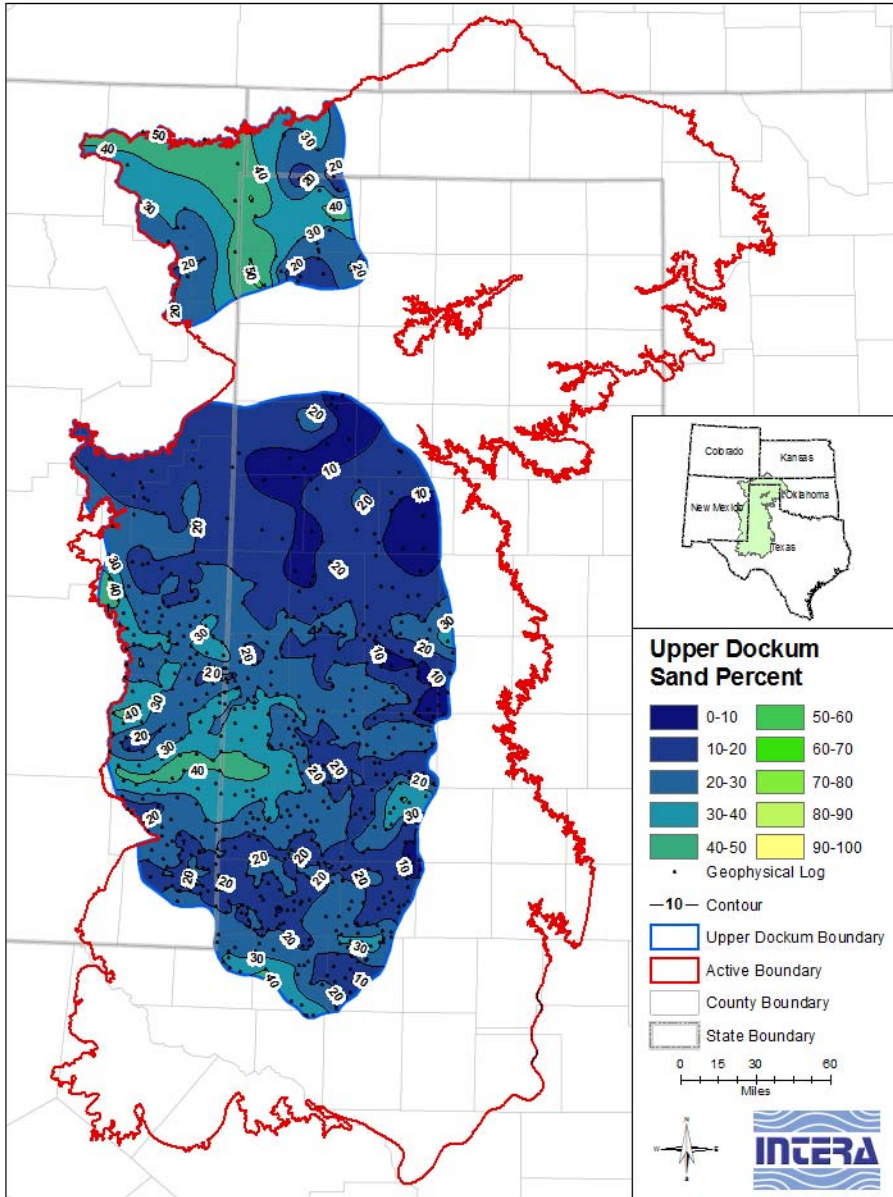

Total HPAS Thickness

- Highest where the Dockum is thickest in the South
- Generally corresponds with area of poor water quality in the Dockum

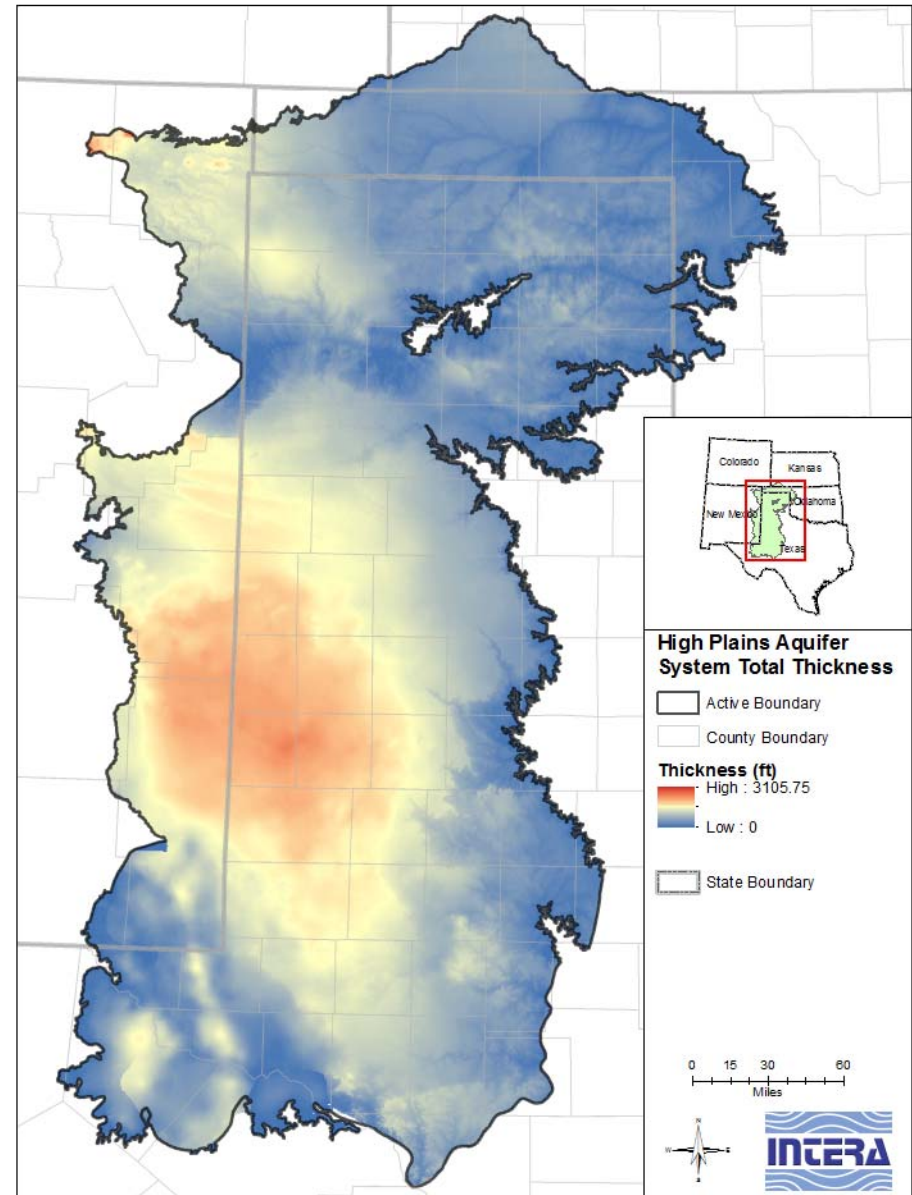


Water Levels


- Water-level data from 21,645 wells were retrieved from
 - TWDB groundwater database
 - Groundwater Conservation Districts
 - USGS groundwater database
- Wells were assigned to aquifers based on the current study's new structural surfaces
- When no well screen information was known, total depth and professional judgment was used (e.g. other information, such as water level trends, nearby well completions)
- Predevelopment estimates utilized known spring and other surface discharge locations to infill areas with lack of data

Pre-development Water Levels



All gradients generally west-southwest

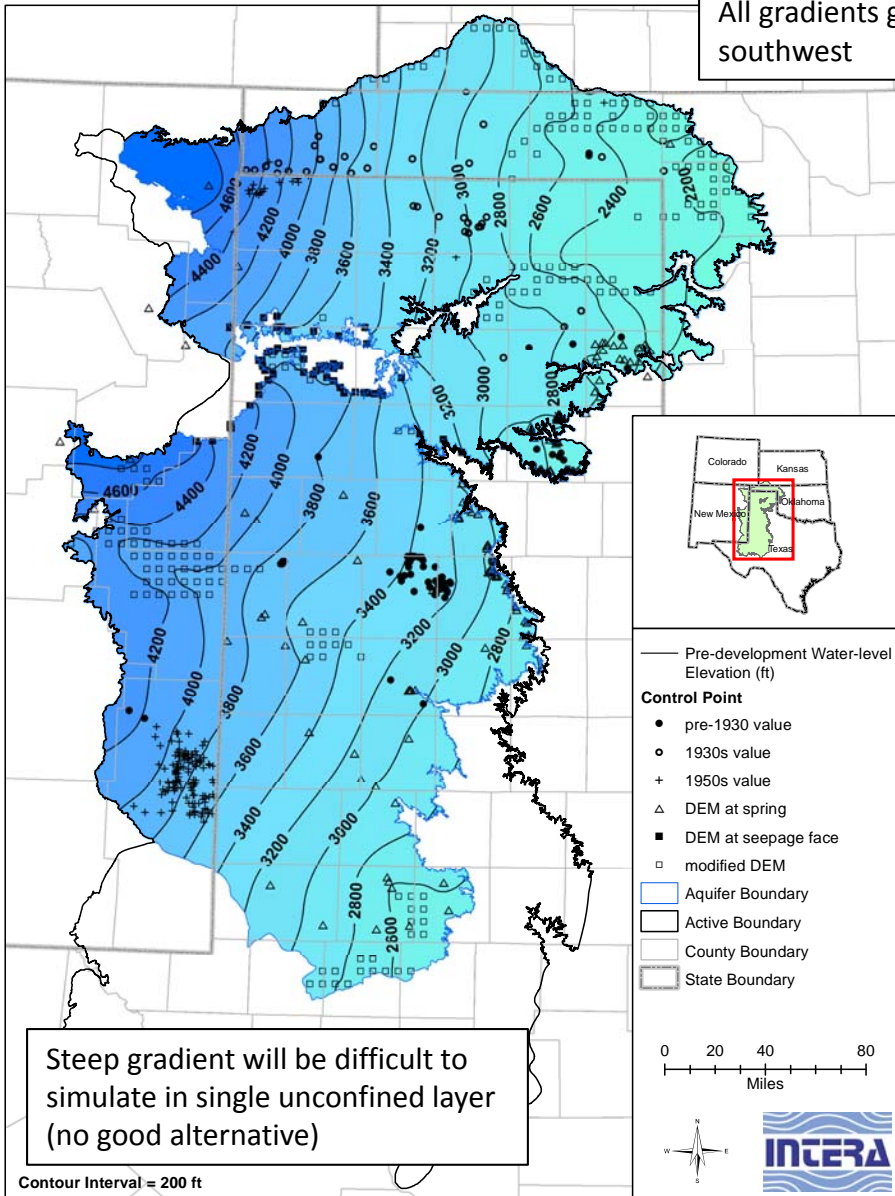

Steep gradient will be difficult to simulate in single unconfined layer (no good alternative)

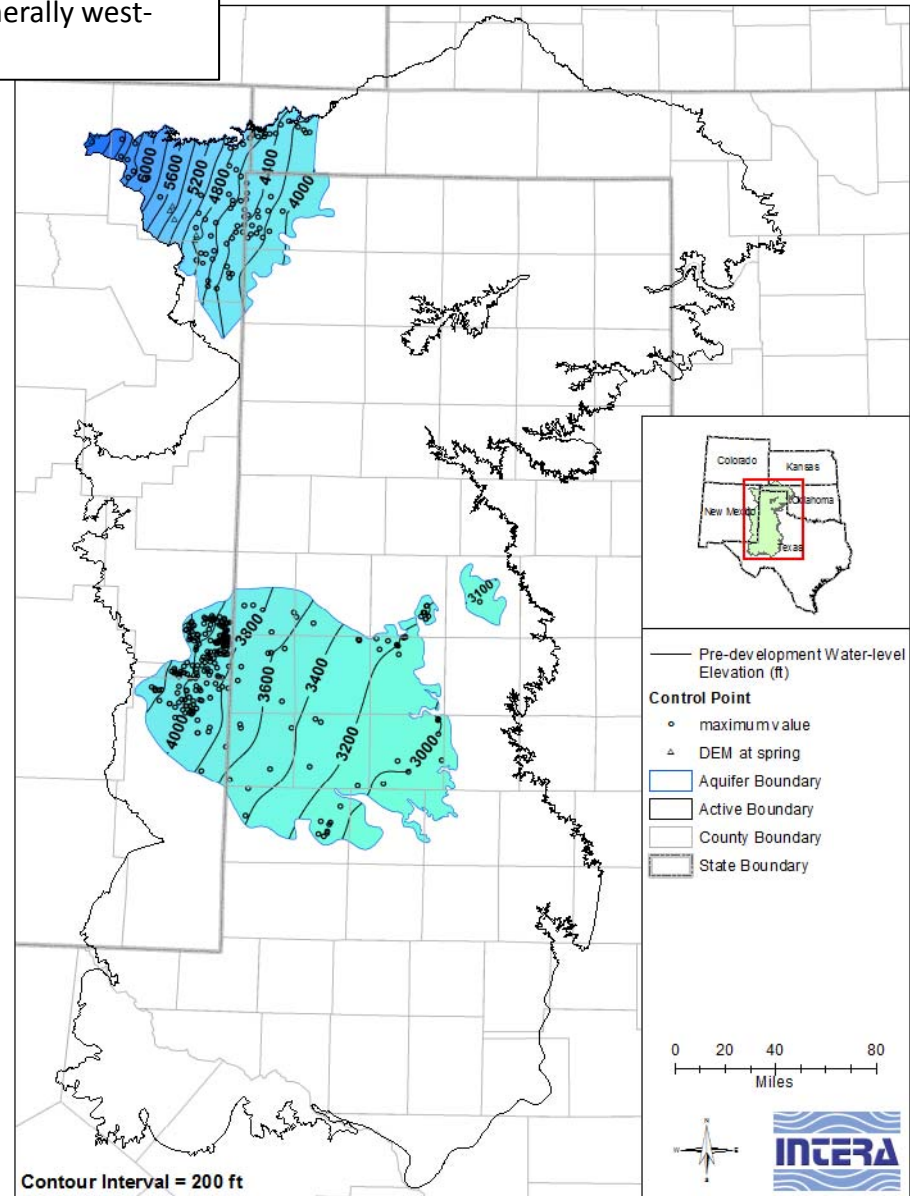


Pre-development Water Levels

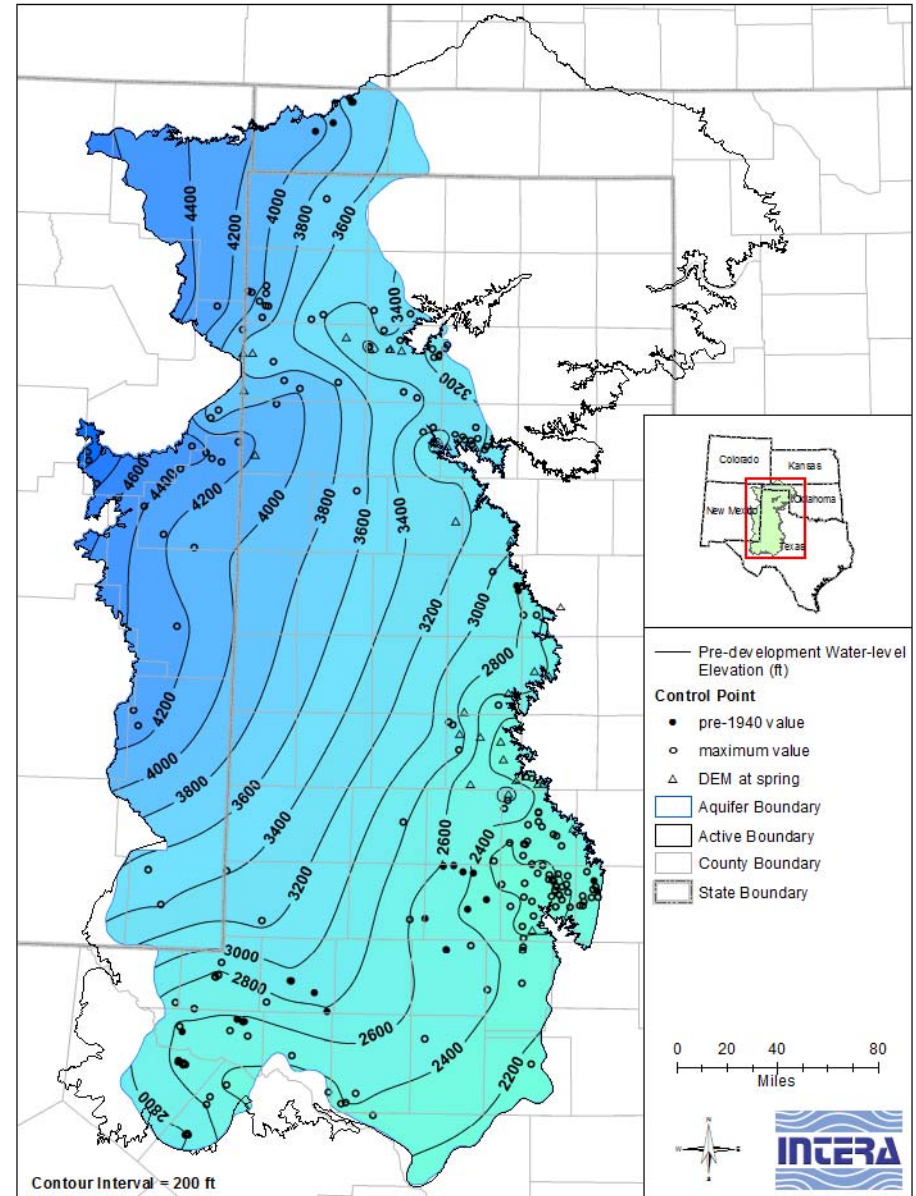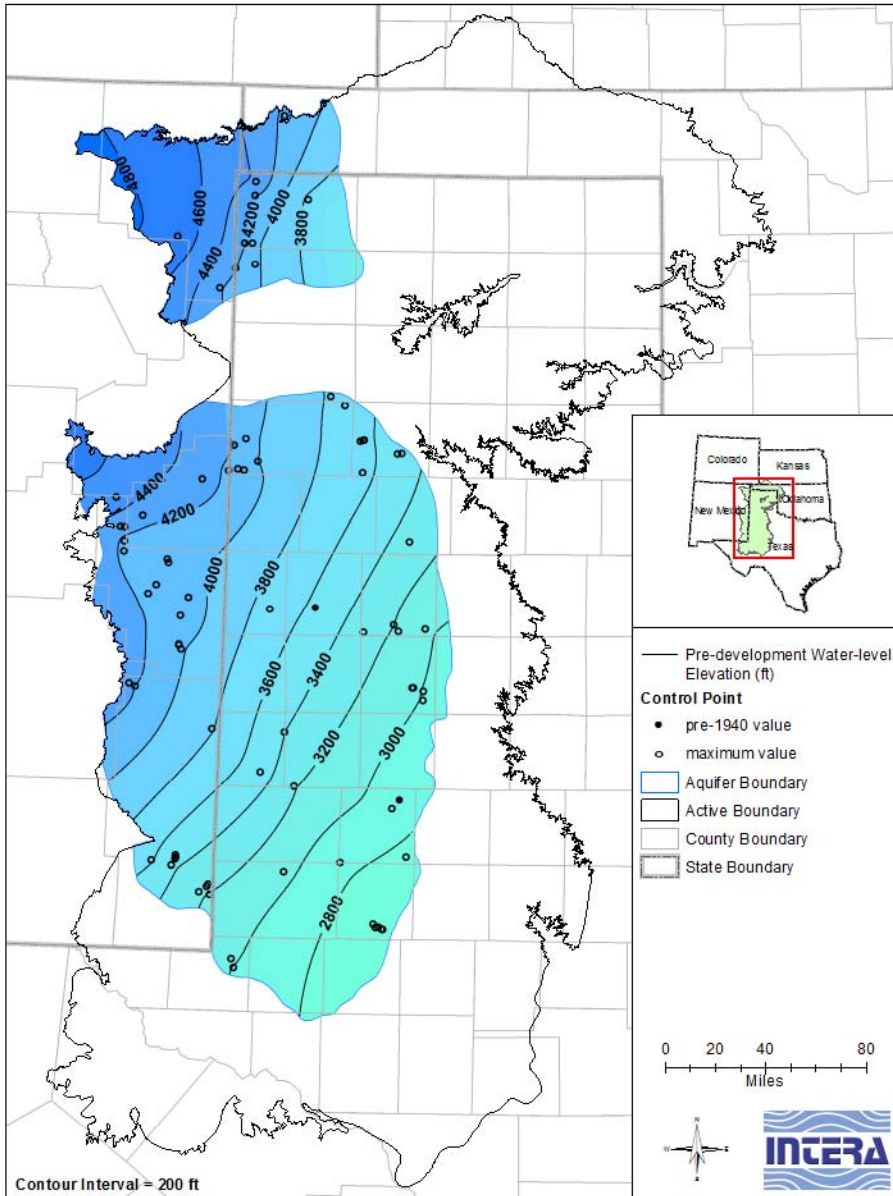

Transient Water Levels


N. Ogallala: 1288 hydrographs

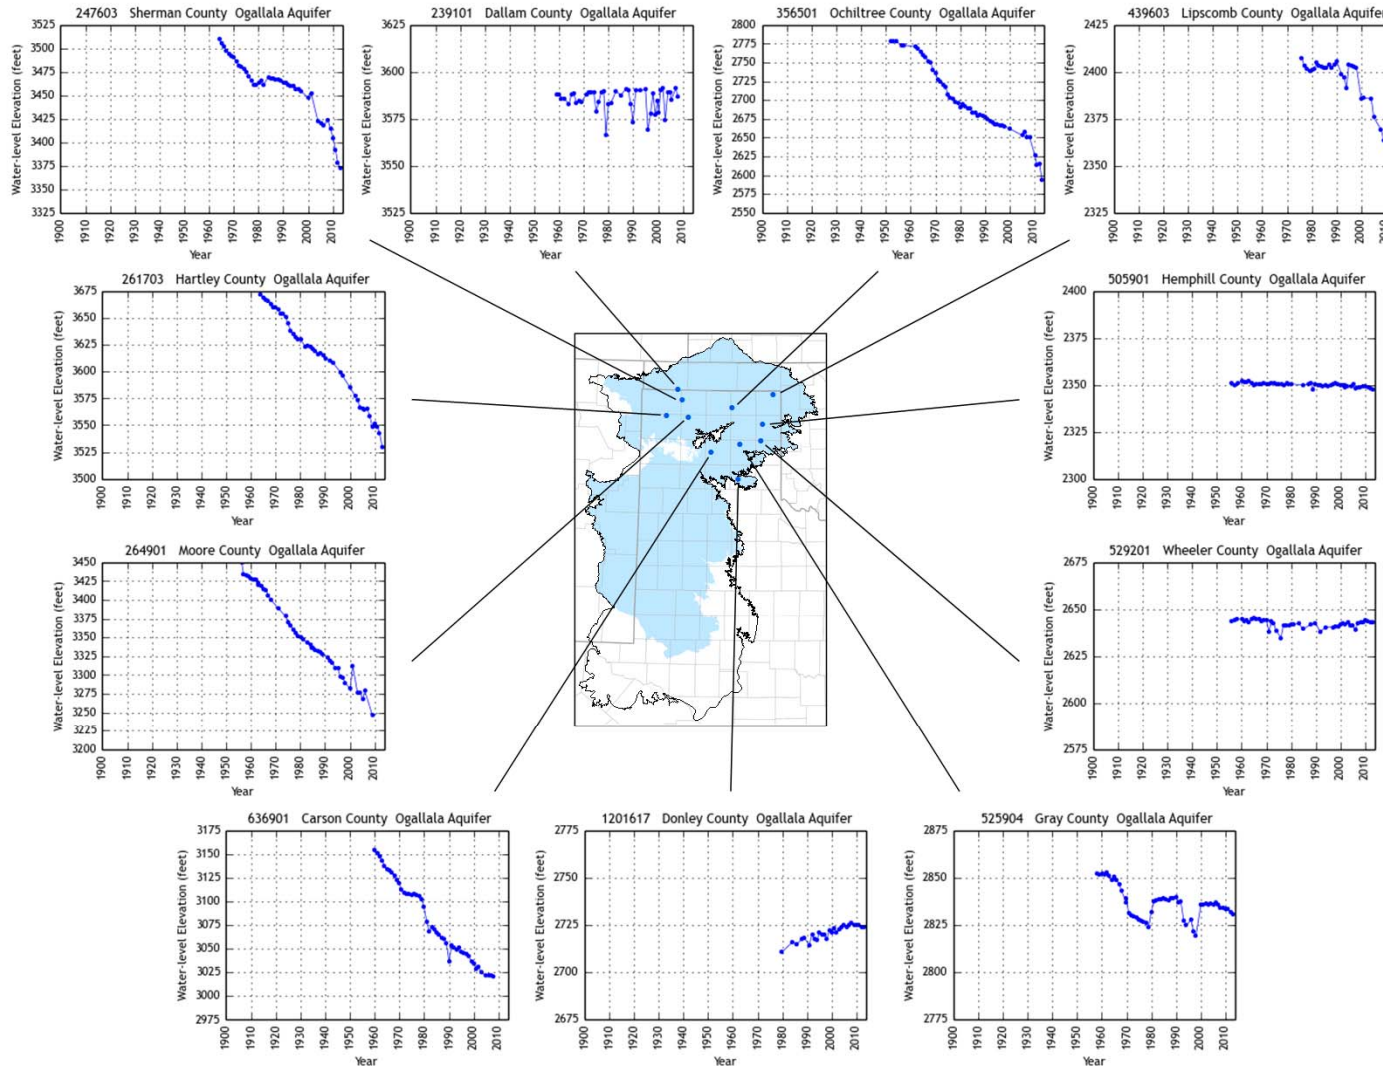

Areas with small initial saturated thickness or unsuitable topography (for ag) show steadier levels

Transient Water Levels

S. Ogallala: 1721 hydrographs

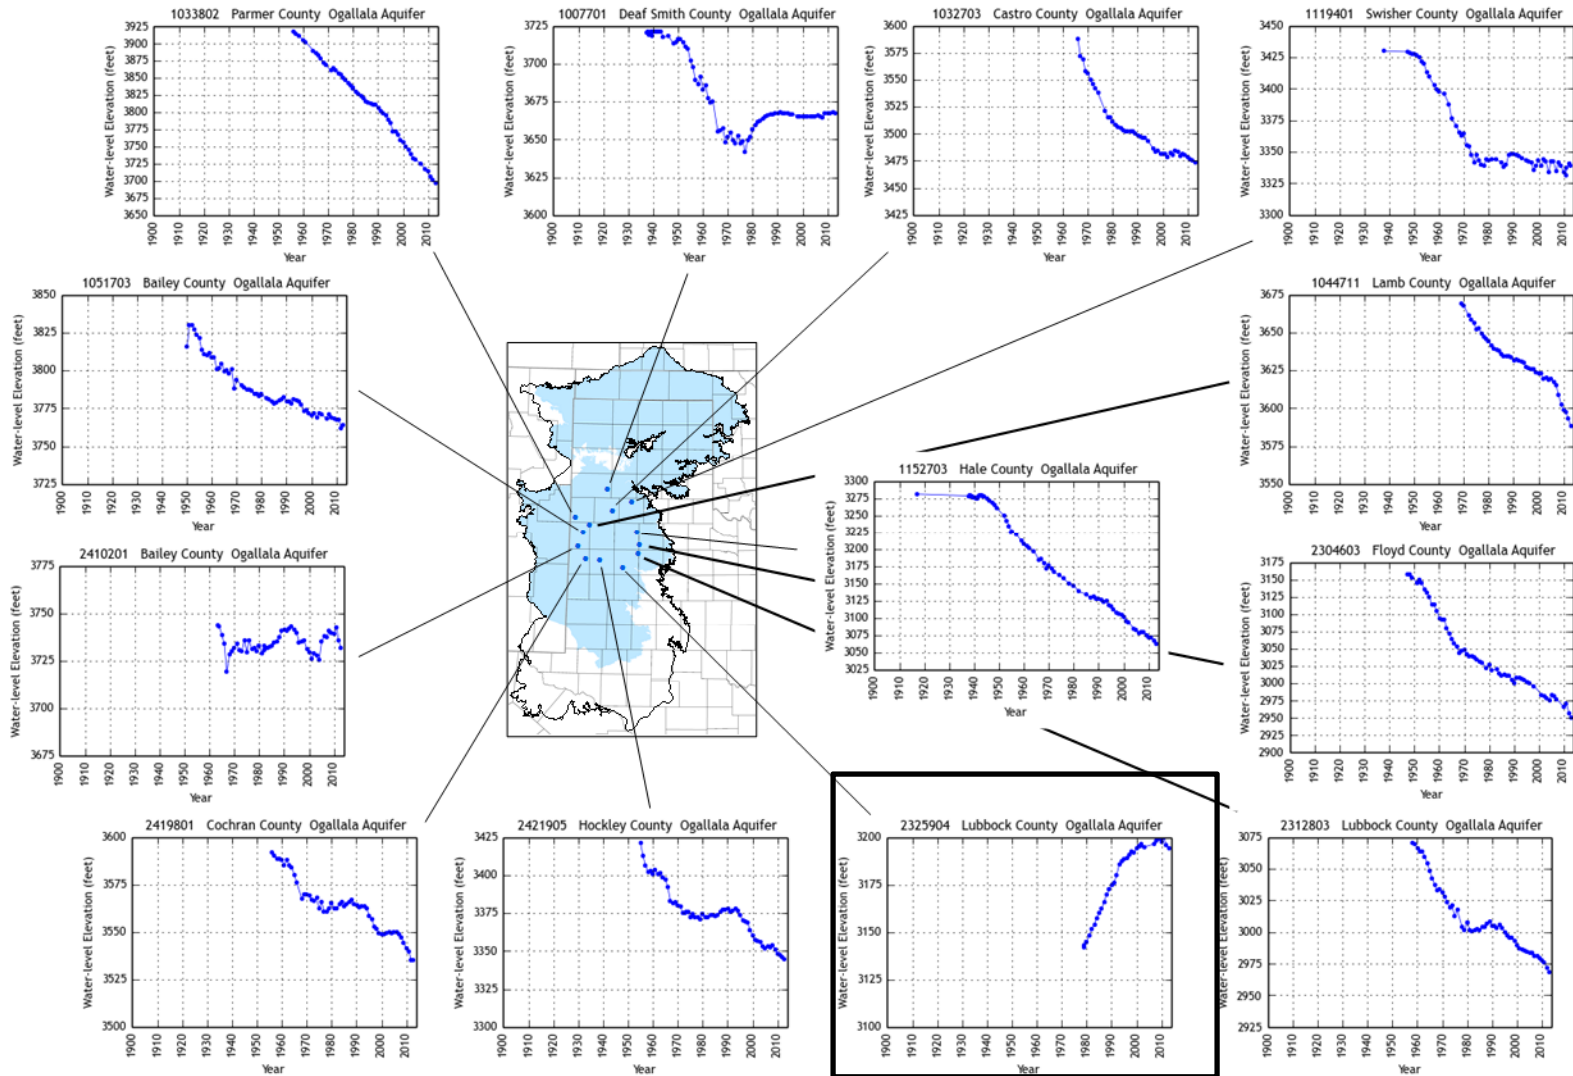


Believed to be due to urban runoff to playas

Transient Water Levels


Rita Blanca: **19** hydrographs

Edwards-Trinity (High Plains) : **10** hydrographs

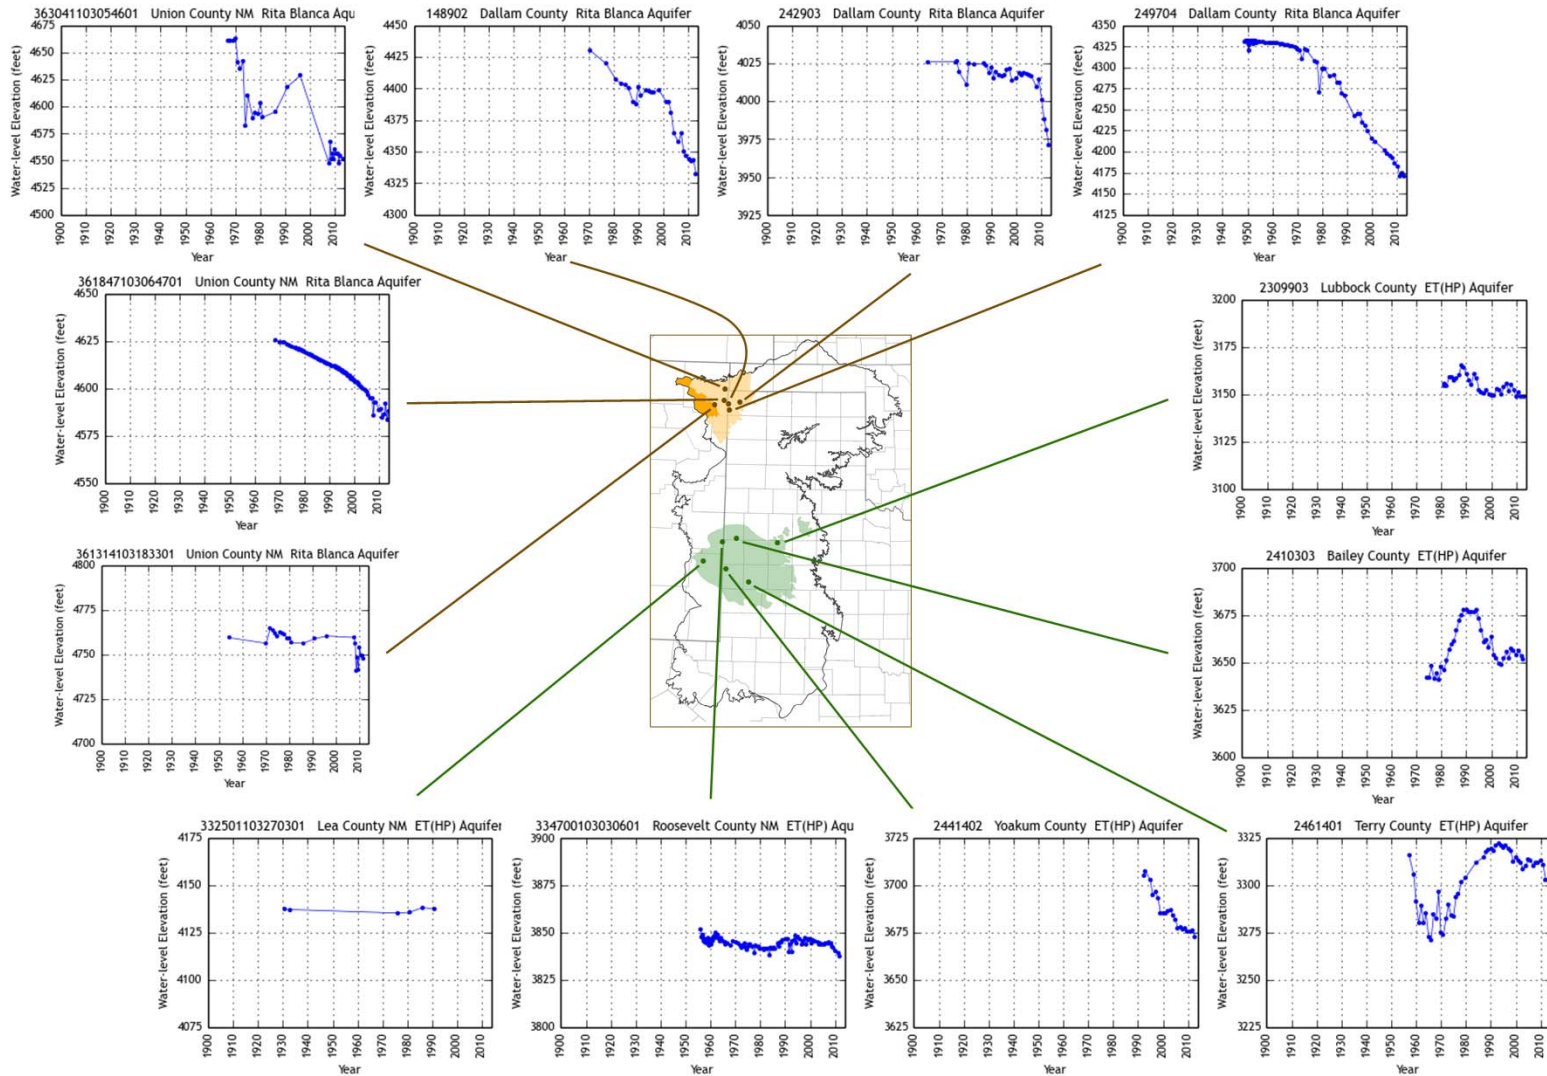














Transient Water Levels

Upper Dockum: 26 hydrographs

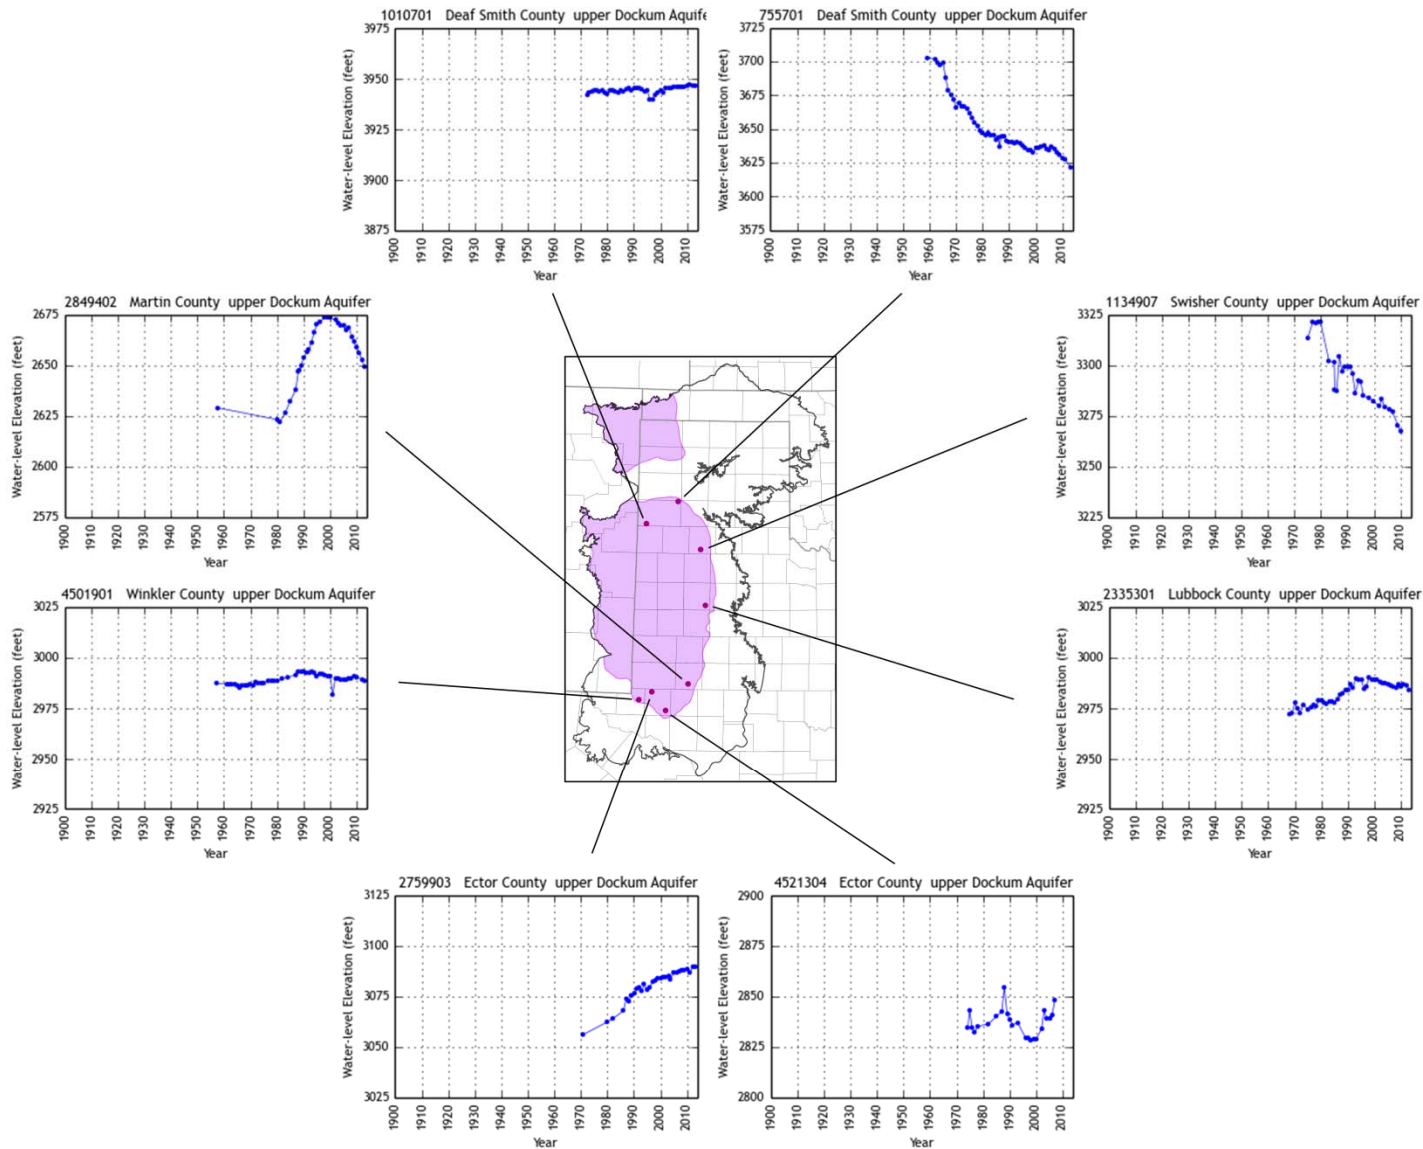



Transient Water Levels

Lower Dockum: **165** hydrographs

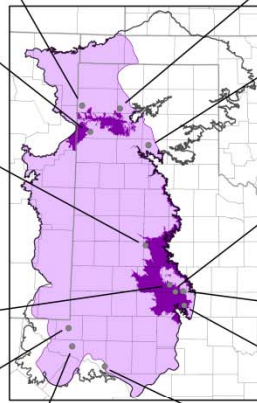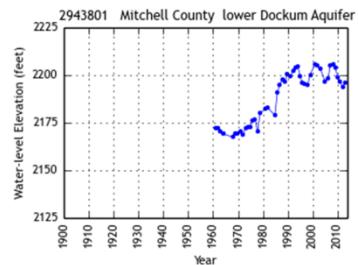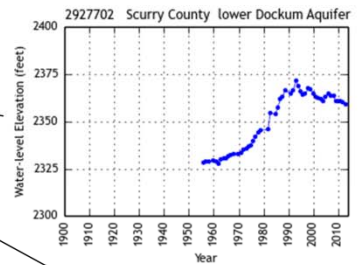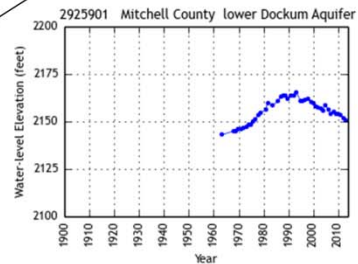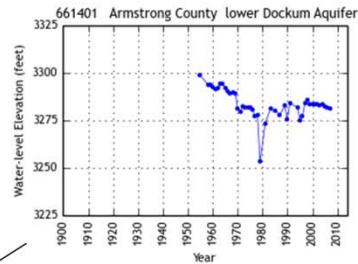

Most hydrographs in areas near outcrop where water quality is best
Currently lack hydrographs showing potential effects of O&G water use on Santa Rosa water levels



Water Level Decline

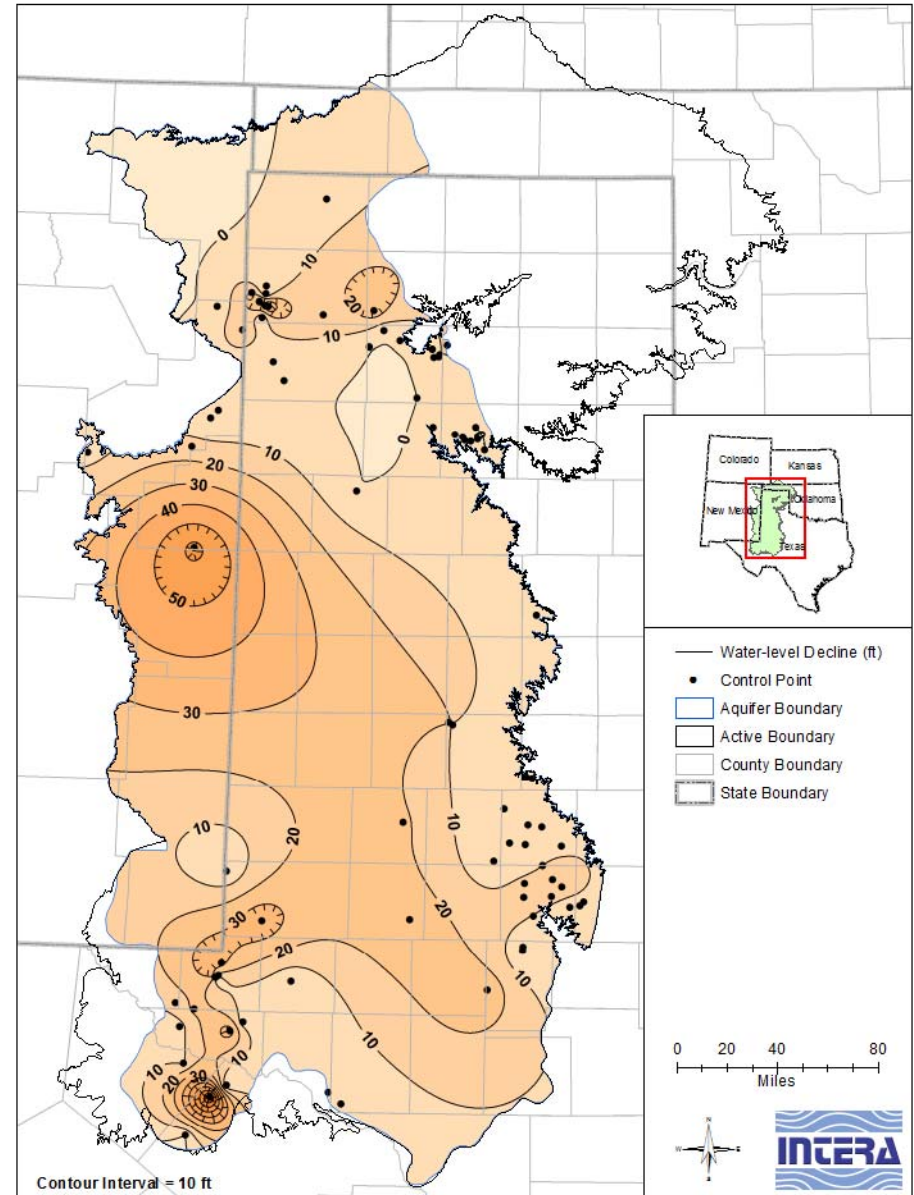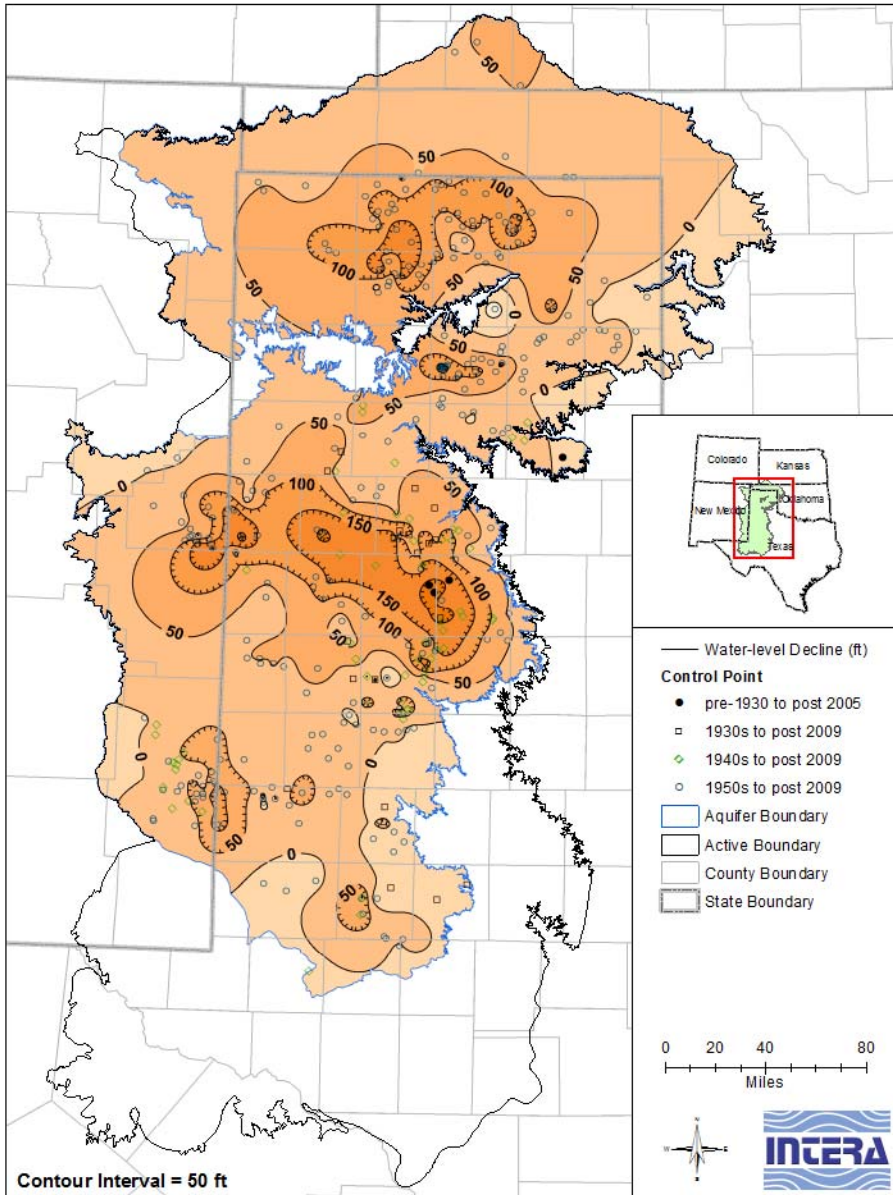



Hydraulic Parameters

Initial values	OGALLALA	ETHP	DOCKUM
K (horizontal)	Naing (2002) + Dutton and others (2001) + additional point data from cities/GCDs	Effective K values derived from values given in Blandford and others (2008)	Sand K values in Ewing and others (2008) multiplied by current study's sand fractions
K (vertical)	Blandford and others (2008)	Blandford and others (2008)	Senger and others (1987) + Ewing and others (2008)
Storage	Sy: Blandford and others (2003) + Dutton and others (2001) + McGuire (2012)	Sy : 0.05 for limestone, 0.15 for sand, 0.1 for shale	Ss and Sy : Ewing and others (2008)

Hydraulic Parameters

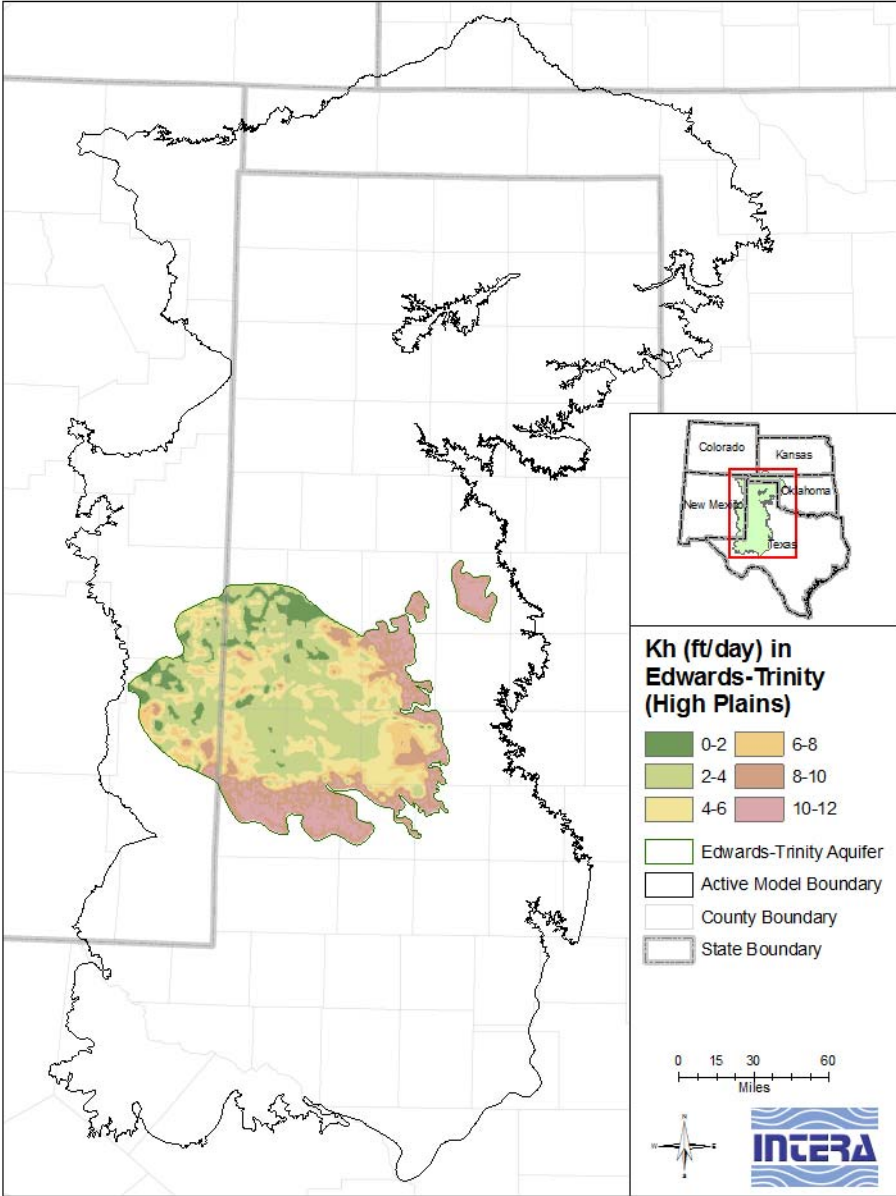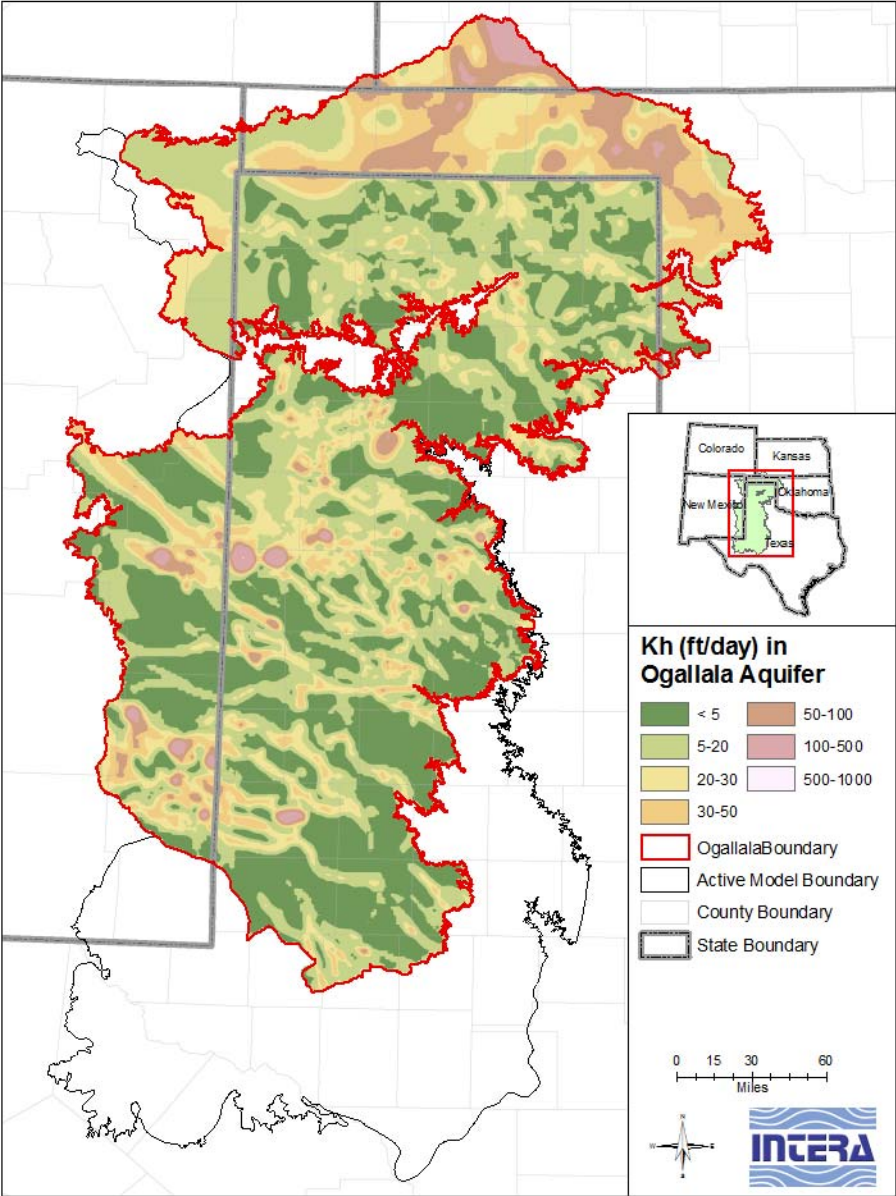

Hydraulic Parameters

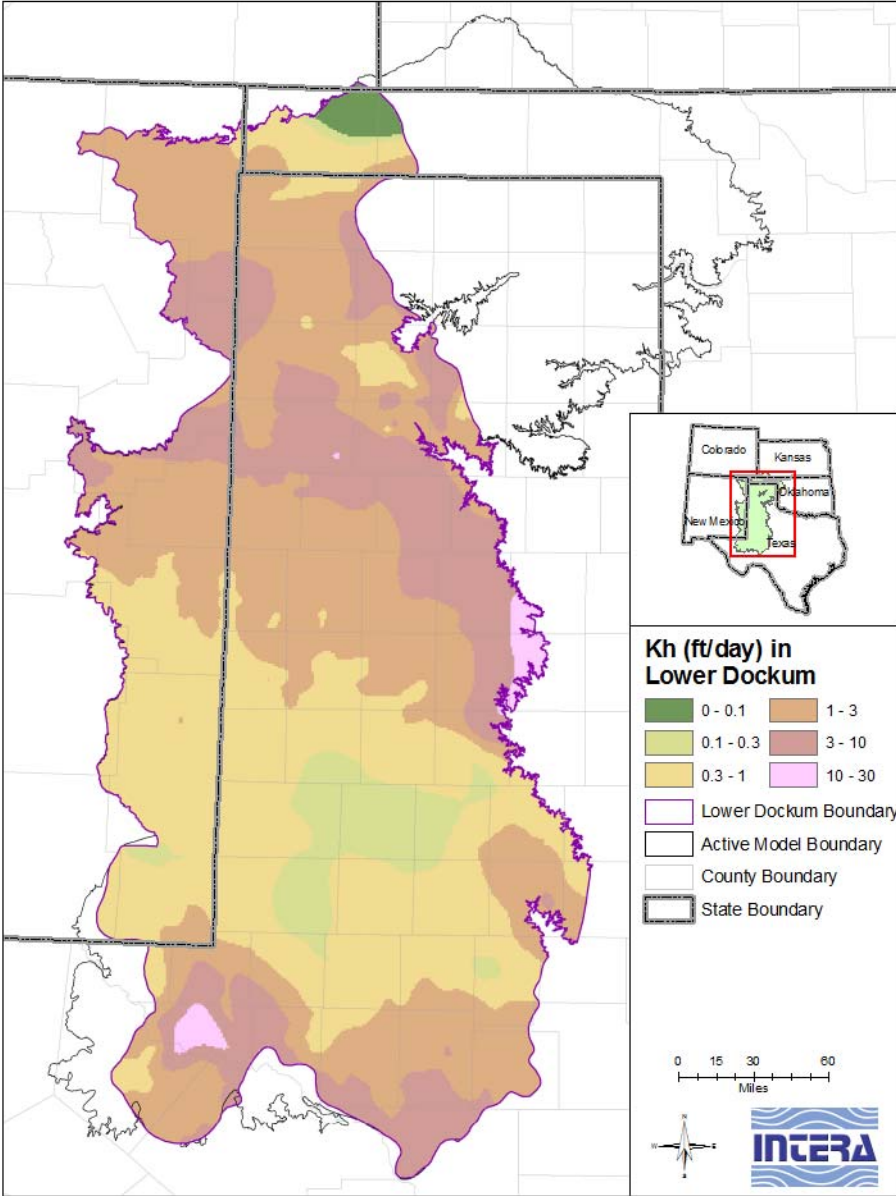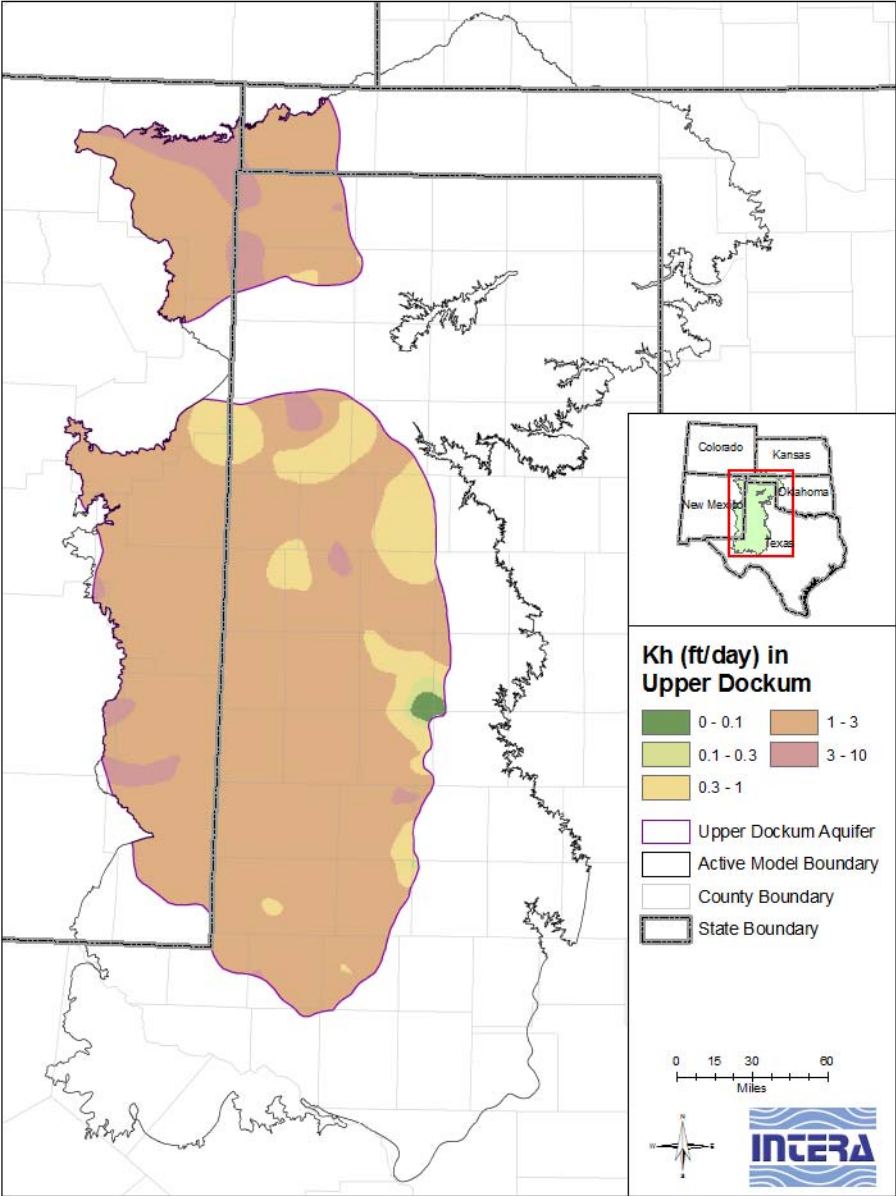


Recharge


	N. OGALLALA	S. OGALLALA	DOCKUM
Pre-development	Based on chloride mass balance + soil type	Based on playa density	From previous GAM (Ewing and others, 2008)
Post-development	Unchanged from pre-development	Based on land use distribution	From previous GAM (Ewing and others, 2008)

Additional district funding allowed new analyses from the Scanlon and Reedy at the BEG, especially in the area of irrigation return flow.

Recharge

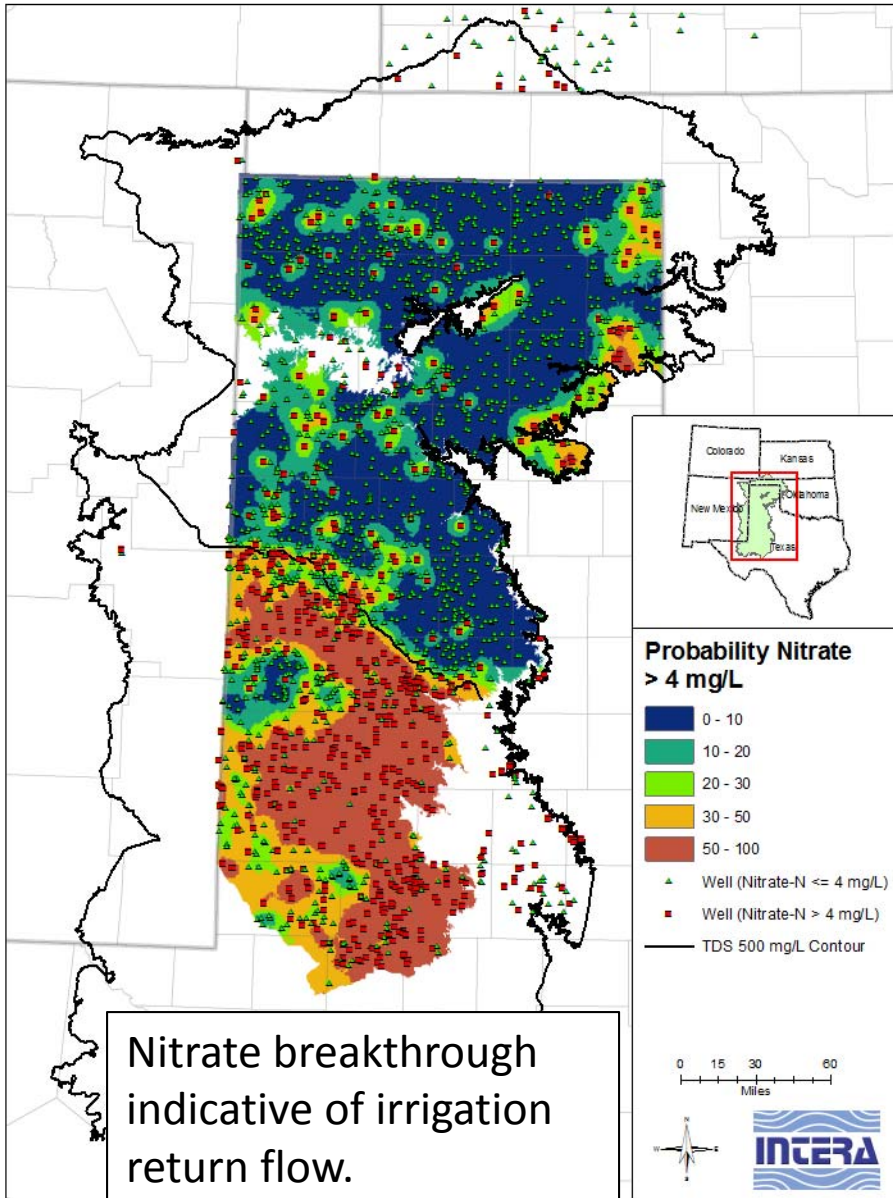


Nitrate breakthrough indicative of irrigation return flow.

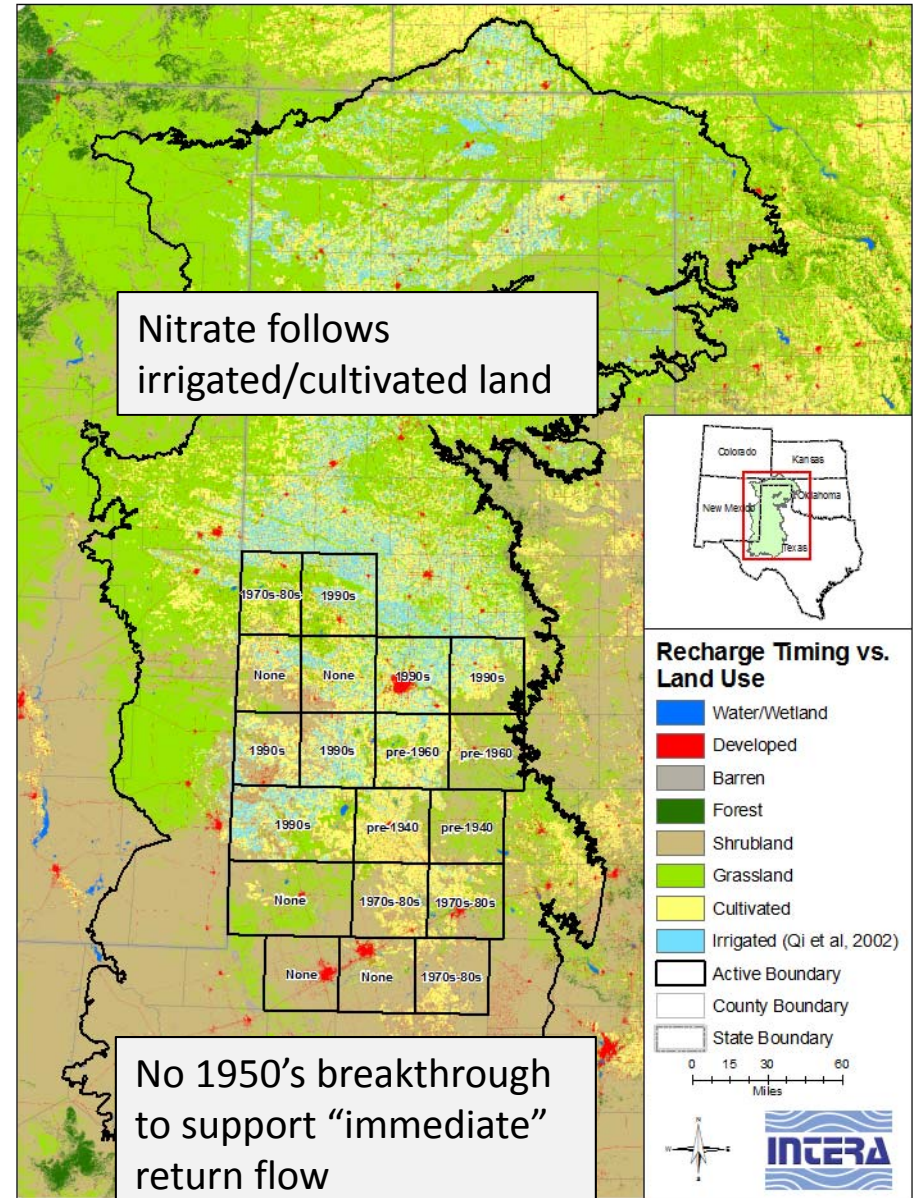



No 1950's breakthrough to support "immediate" return flow

Recharge


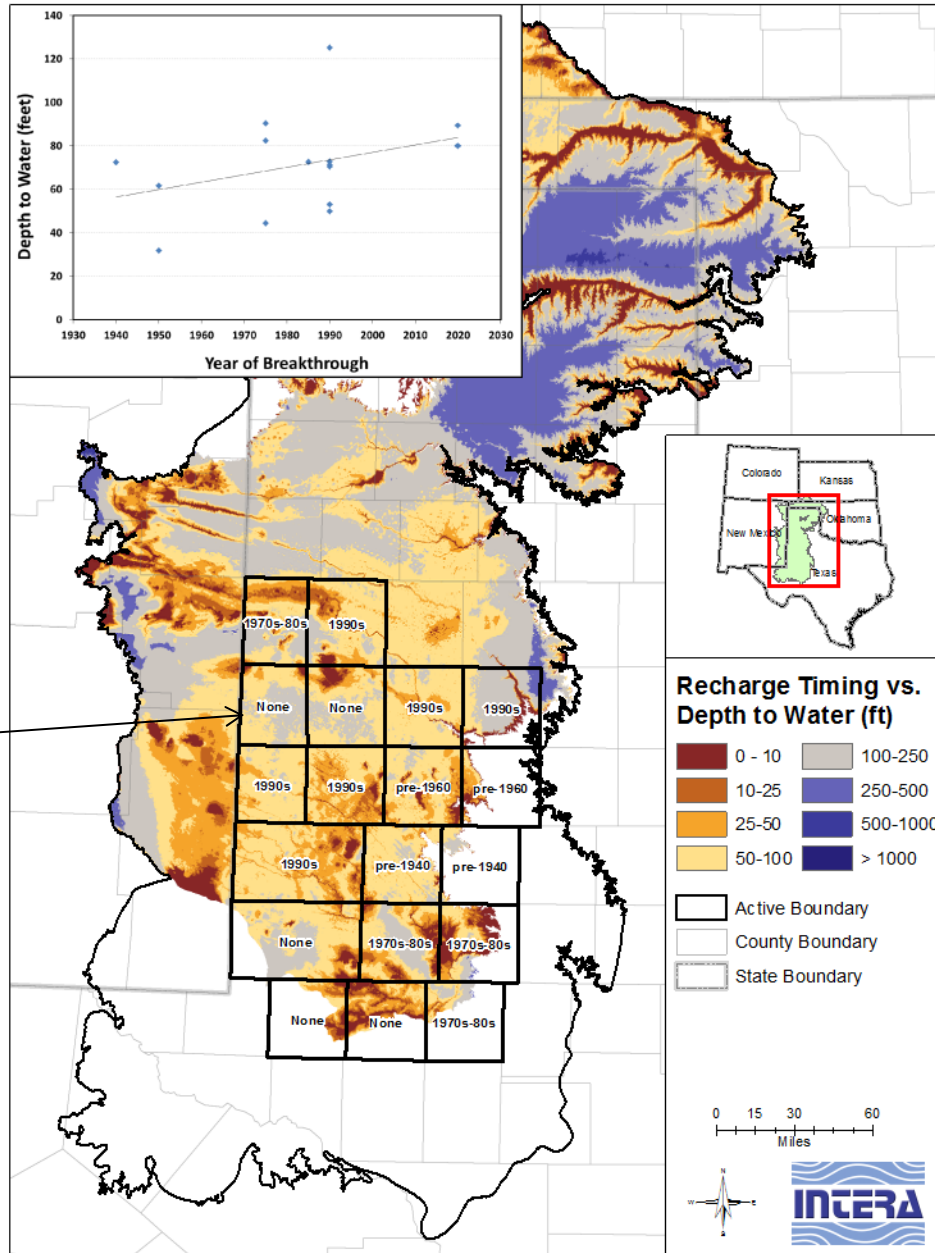


No breakthrough with deep water table, less cultivated land

Recharge Estimate: Ogallala

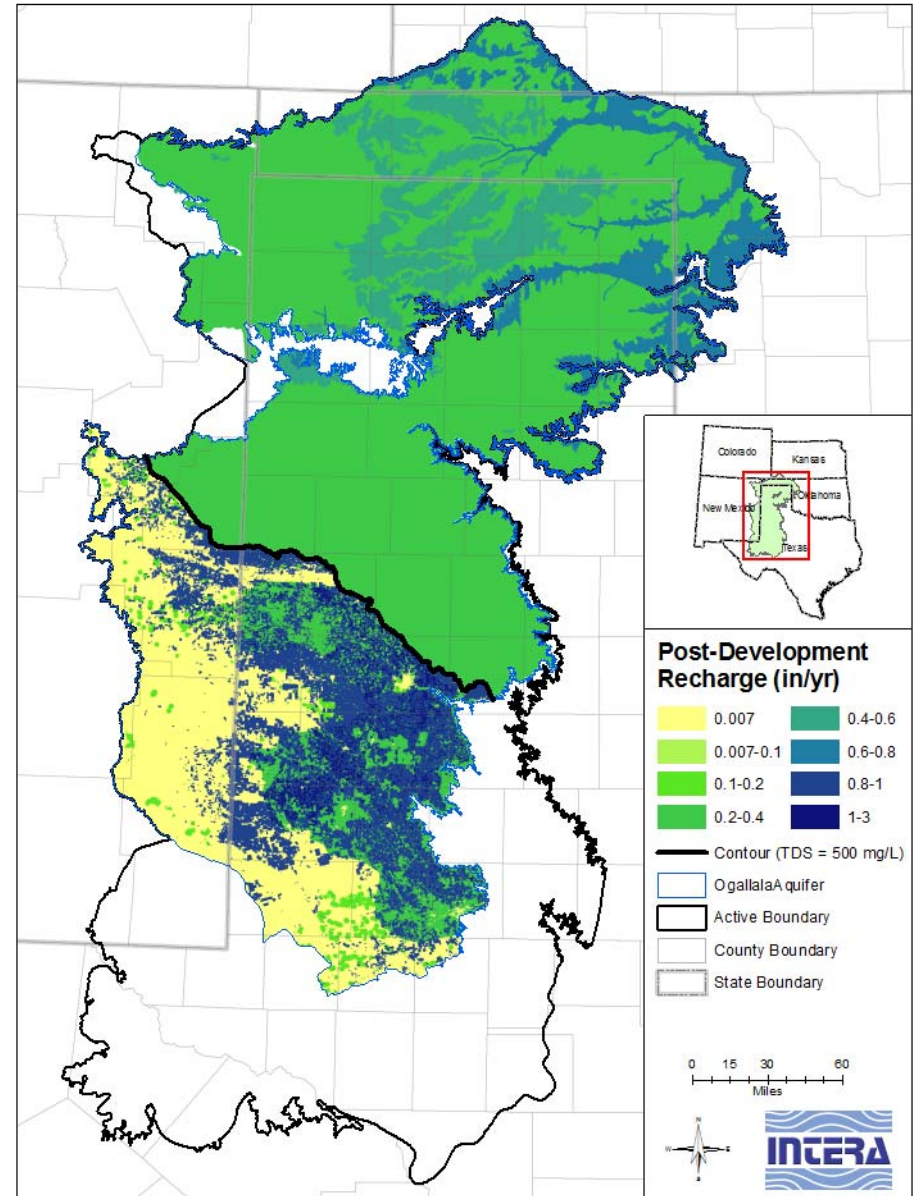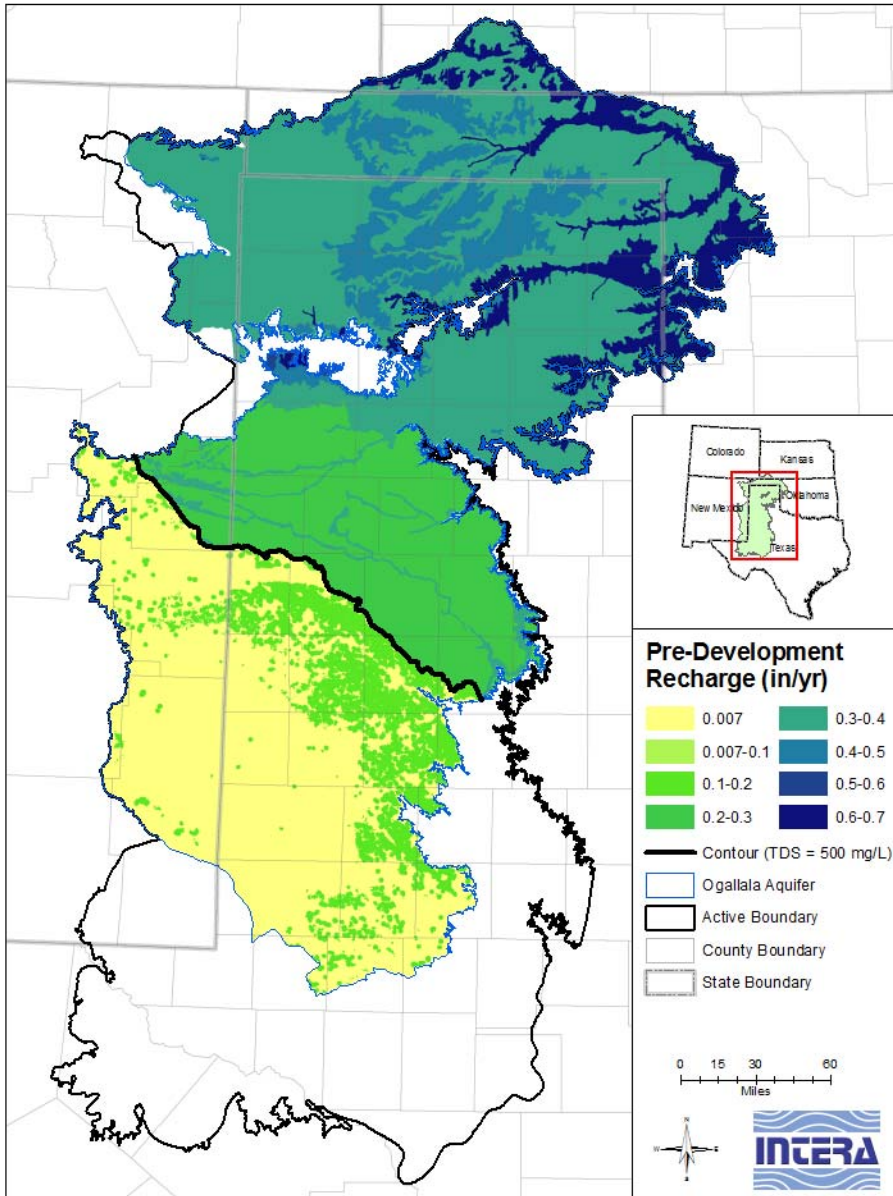



Recharge Estimates: Dockum

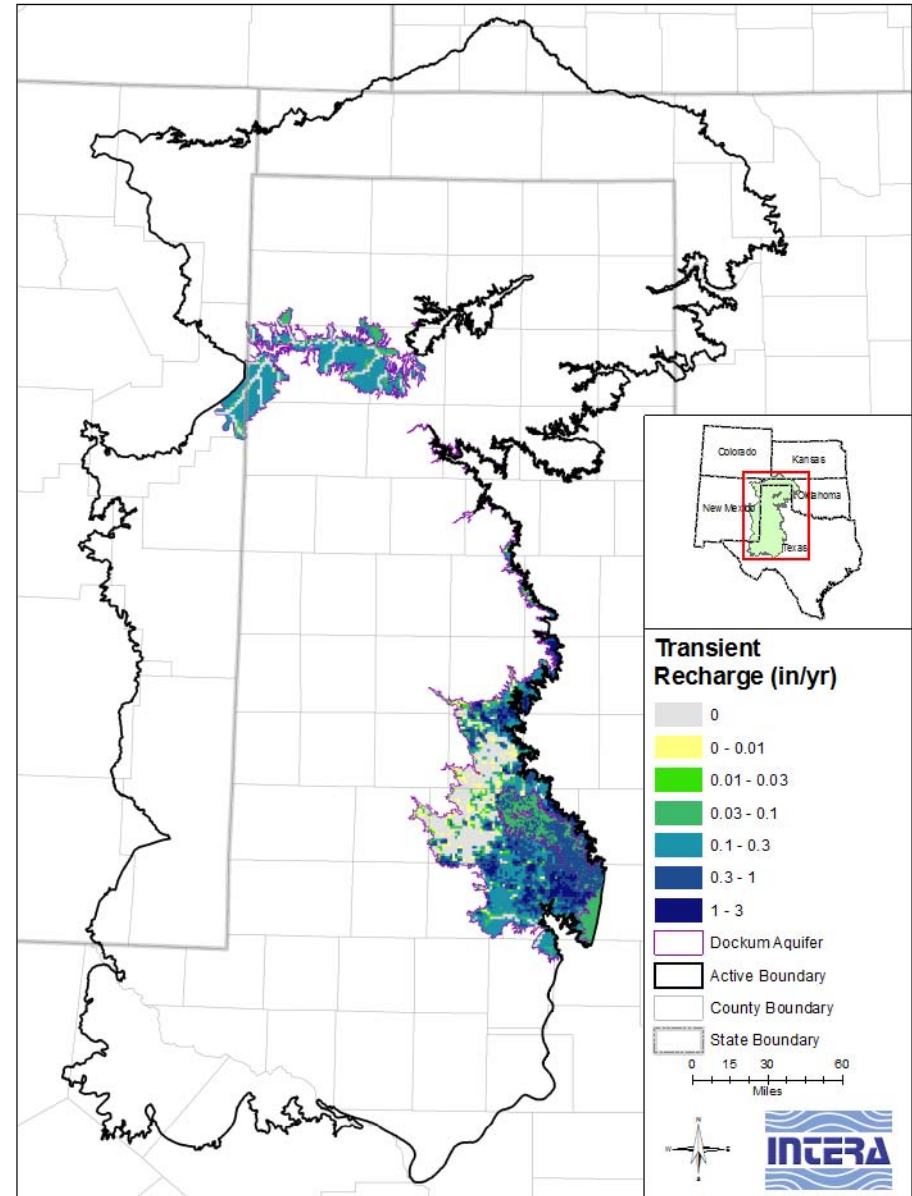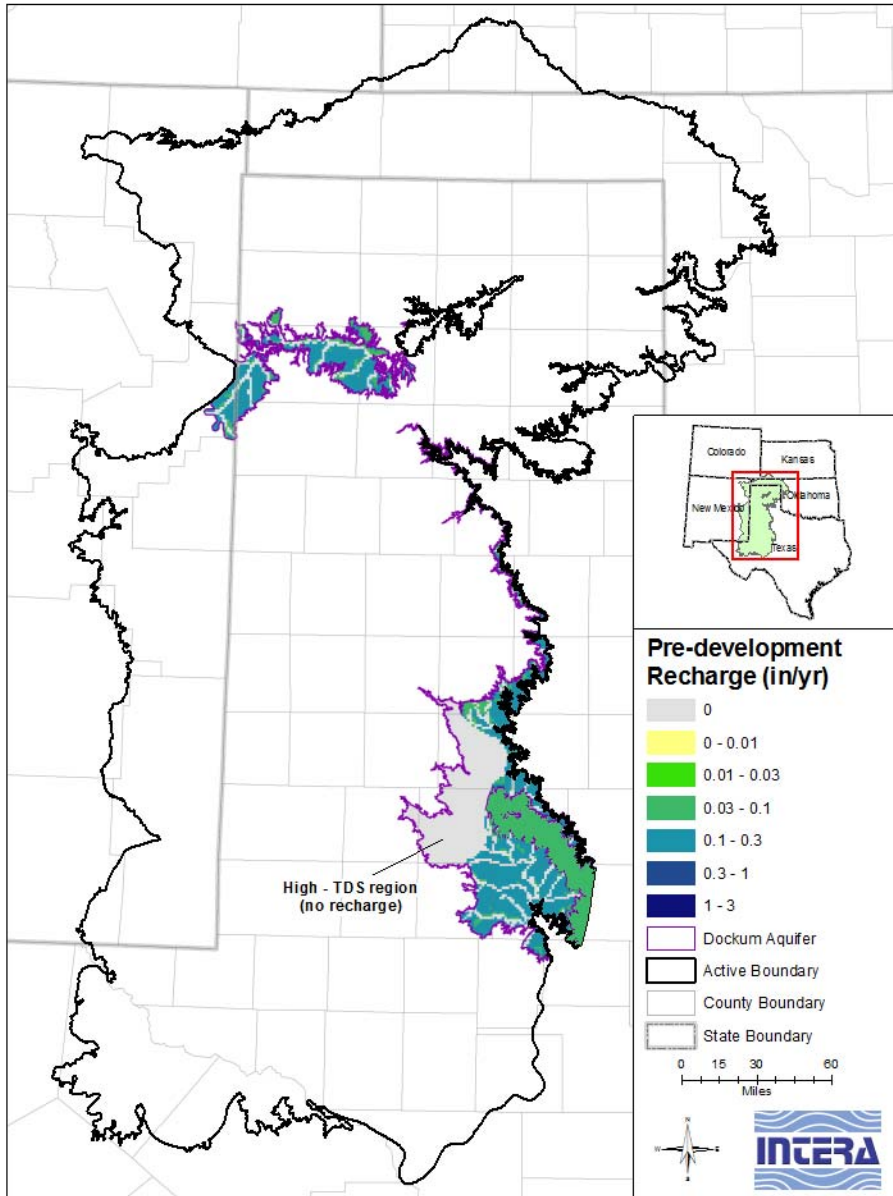

Natural Discharge

- Discharge to surface water from Ogallala not a large portion of post-development water balance
- Used spring locations to tie water levels to surface in Predevelopment
- Saline lakes typically denote areas of former or current discharge.

Natural Discharge: Springs and Saline Lakes

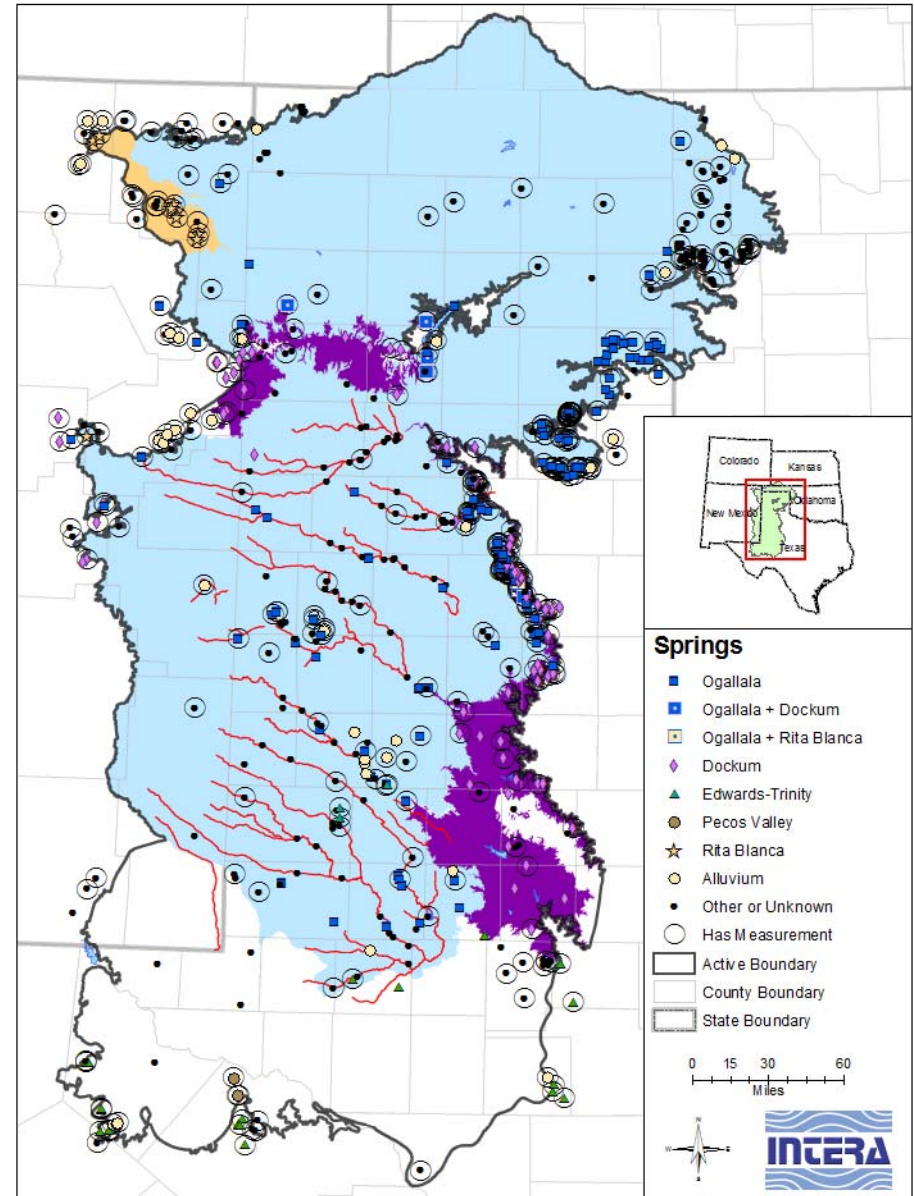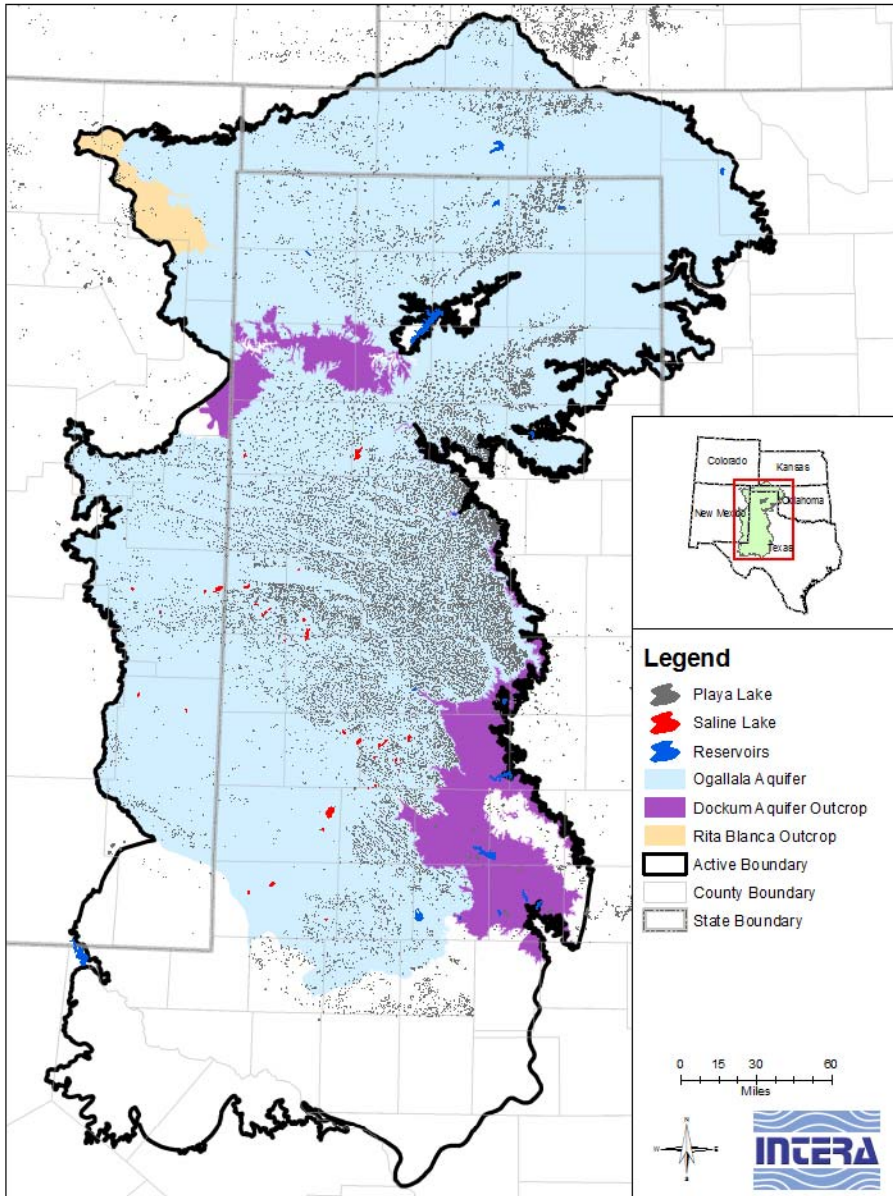

Groundwater Production




- Pumping is the dominant discharge mechanism.
- Pumping data taken from:

TWDB Water Use Survey	TWDB Irrigation Survey
Amosson and others (2003)	North Plains GCD
INTERA, Inc. & Dutton (2010)	Ewing et al. (2008)
Blandford et al. (2003)	Blandford et al. (2008)
- Demand-based pumping estimates prior to 1980 (from irrigation survey) will likely be revised where they are significantly different from storage changes calculated from water levels


Additional district funding allowed development of a GIS-based tool for efficiently calculating storage change.

Groundwater Production

Southern Ogallala Pumping in Texas

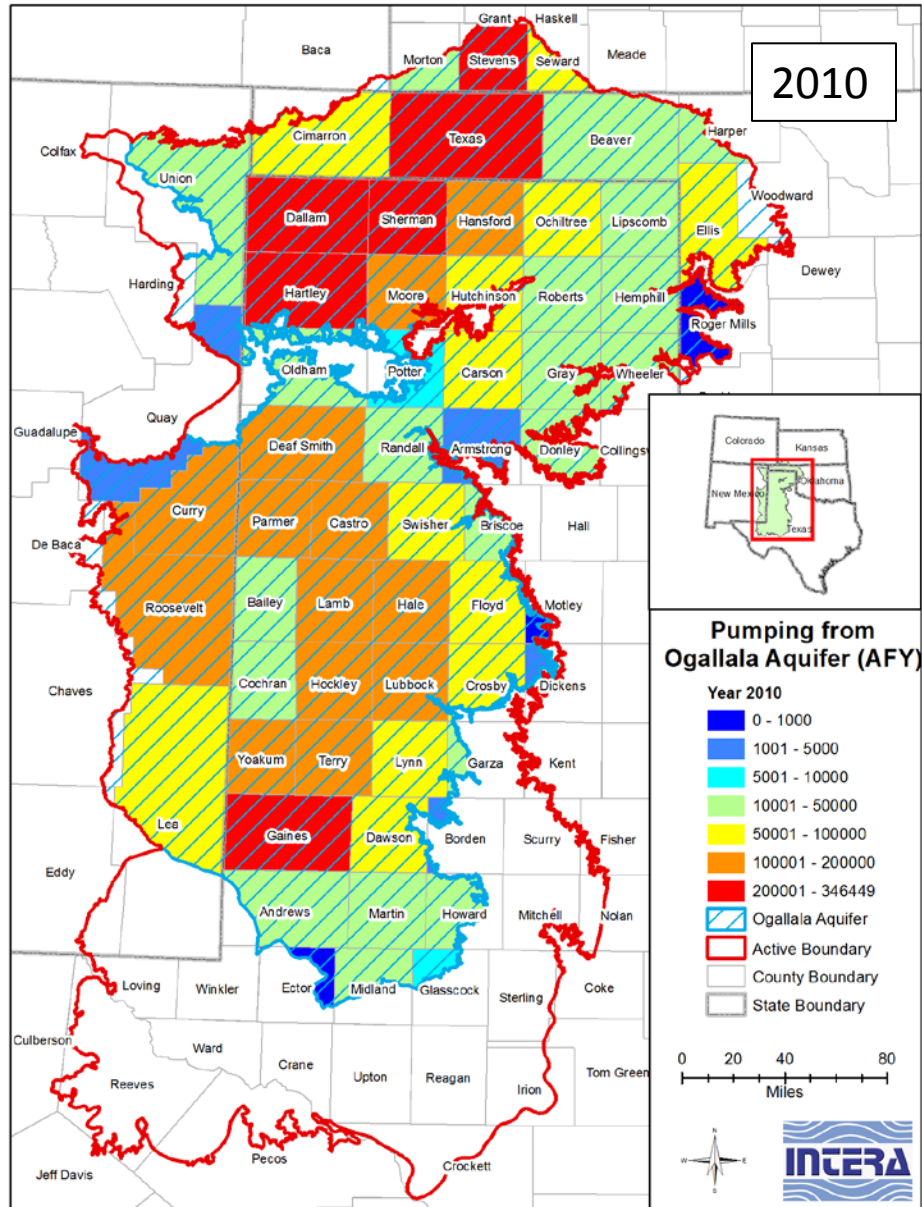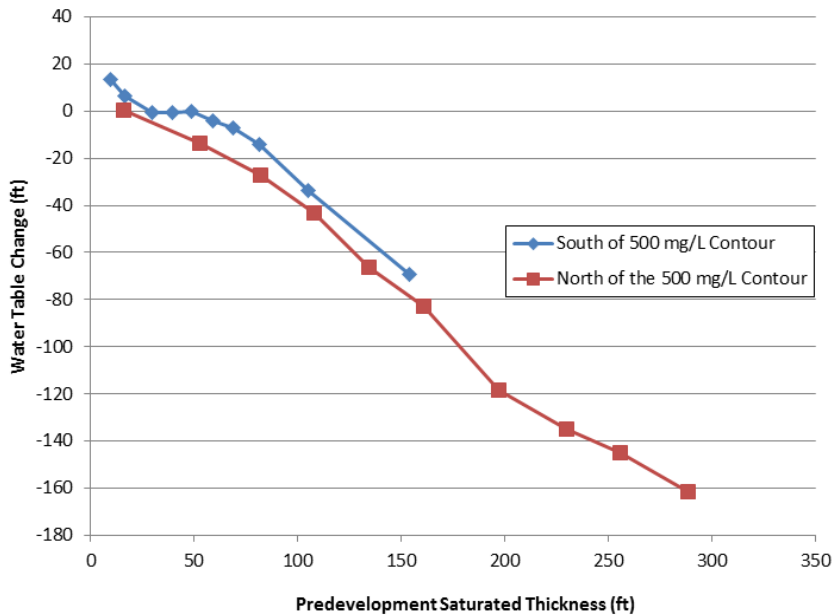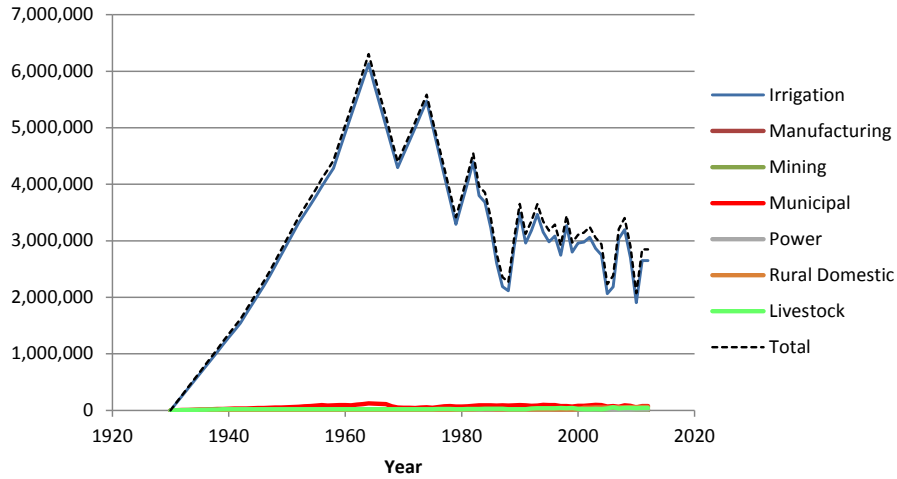


Groundwater Production: Using Storage Change

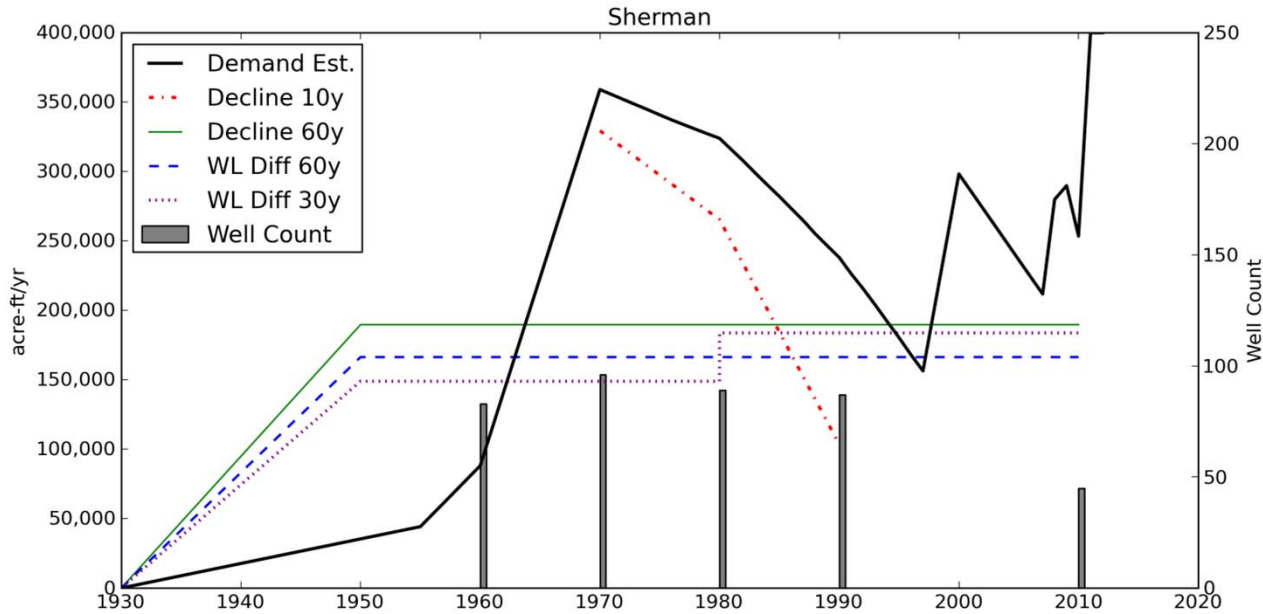


Technique requires high density monitoring network, and high production, otherwise storage change estimate is swamped by "noise" in data.

For some counties, clear differences exist between storage change estimates and demand-based estimates.

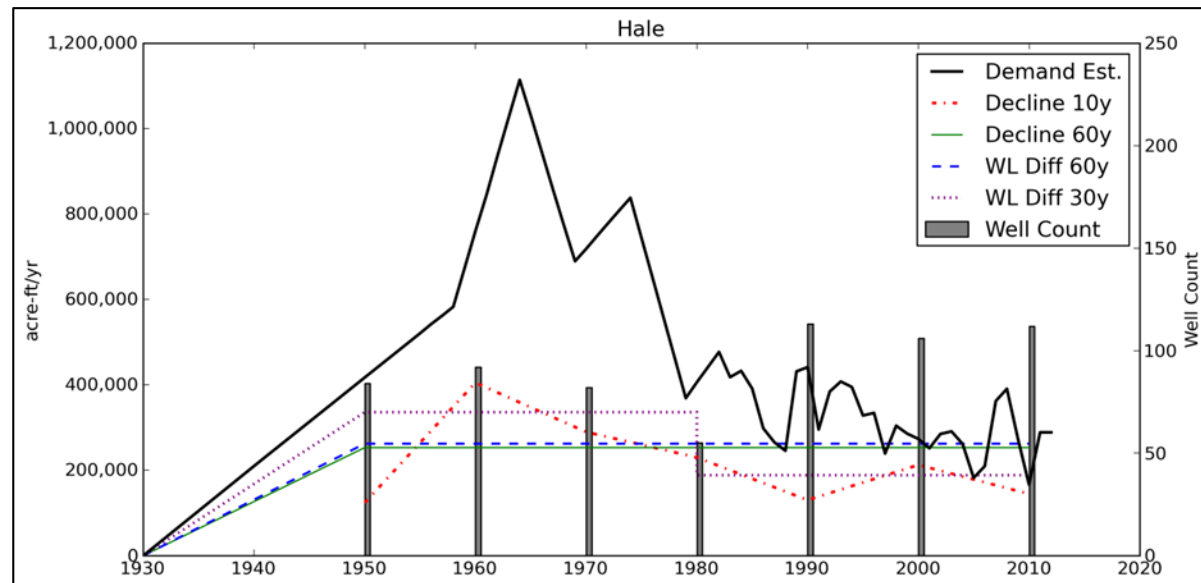

Cross-formational Flow



- Some evidence of cross-formational flow found in literature review based on lithology, heads and hydrochemistry

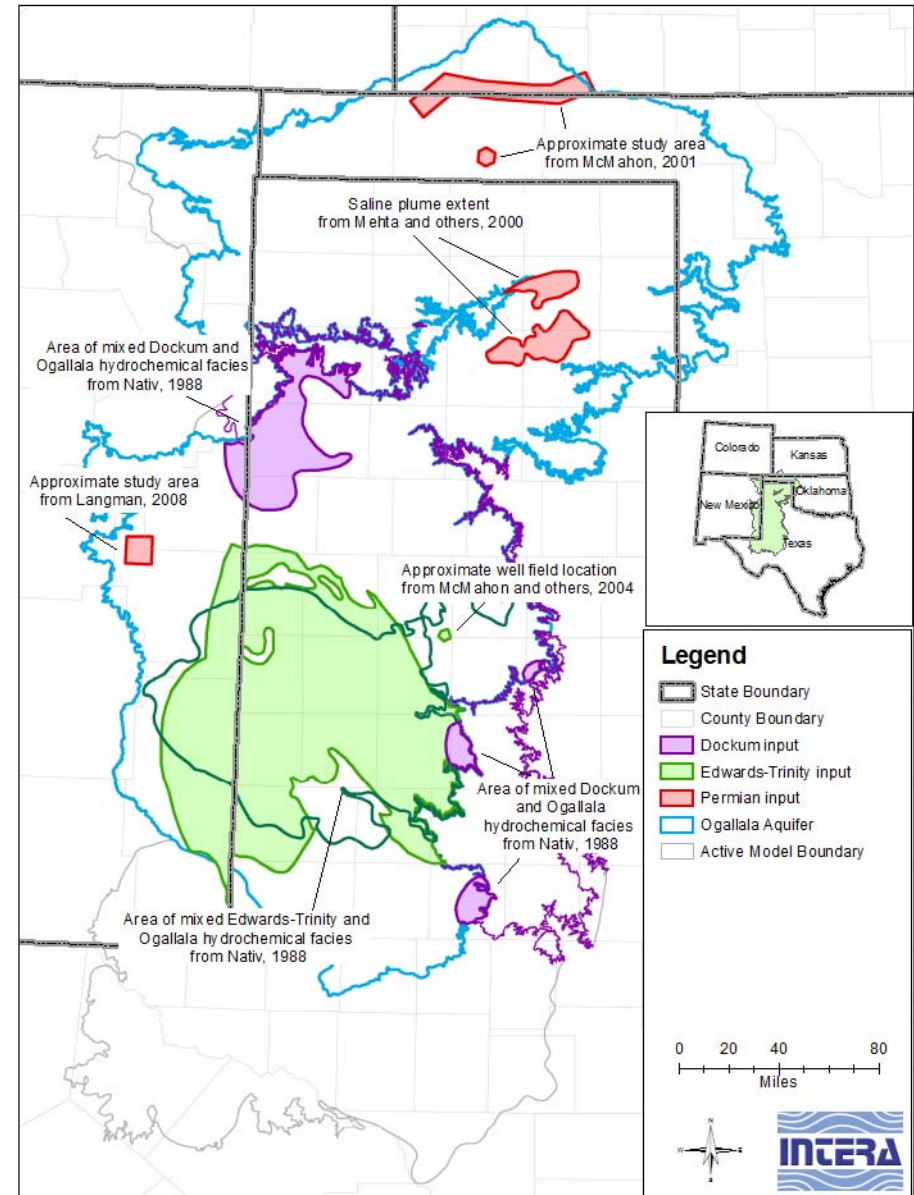

Water Quality


- Groundwater water quality analysis included 5,897 wells retrieved from
TWDB Groundwater Database (TX)
USGS NWIS Database (non-TX)
- Wells were assigned to aquifers based on the current study's new structural surfaces.
- Only the most recent sampling event for a given parameter was chosen from each well.

Water Quality

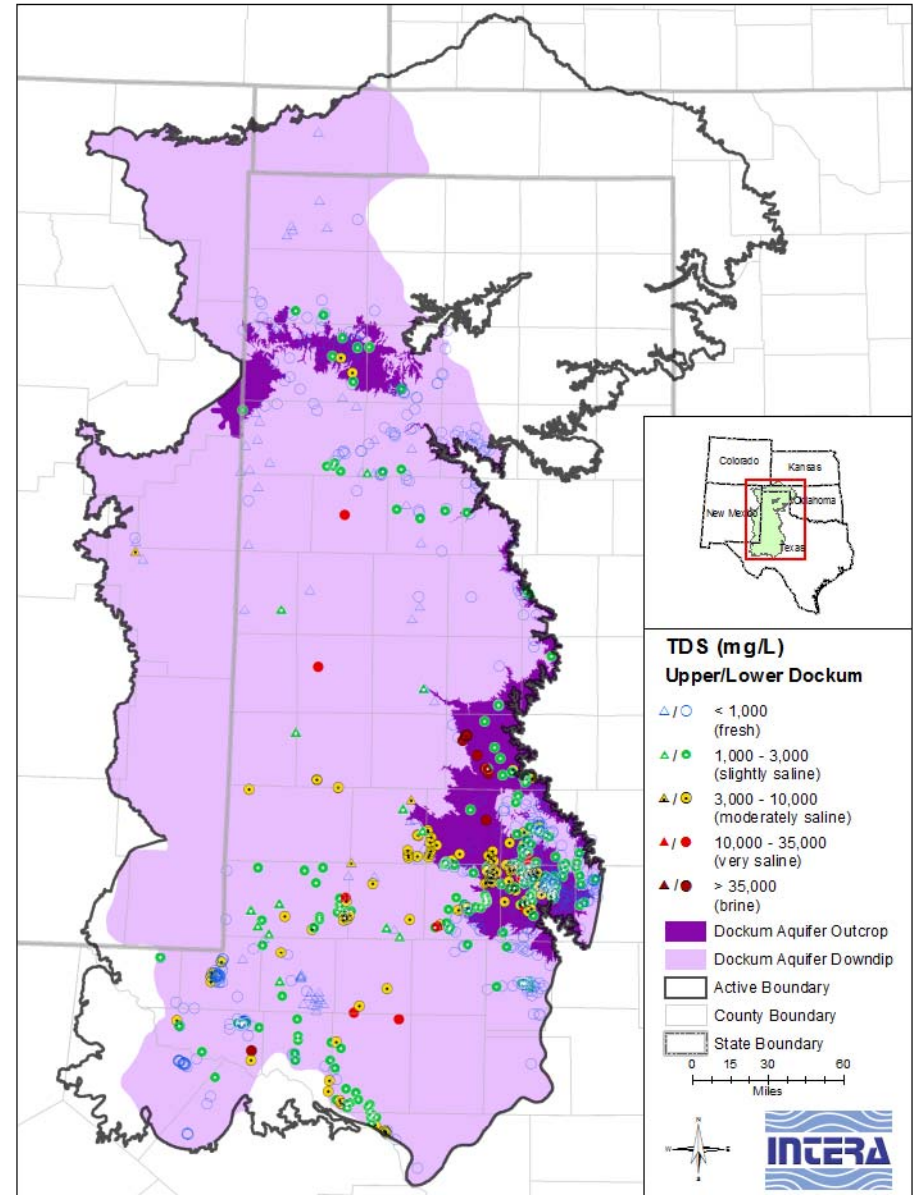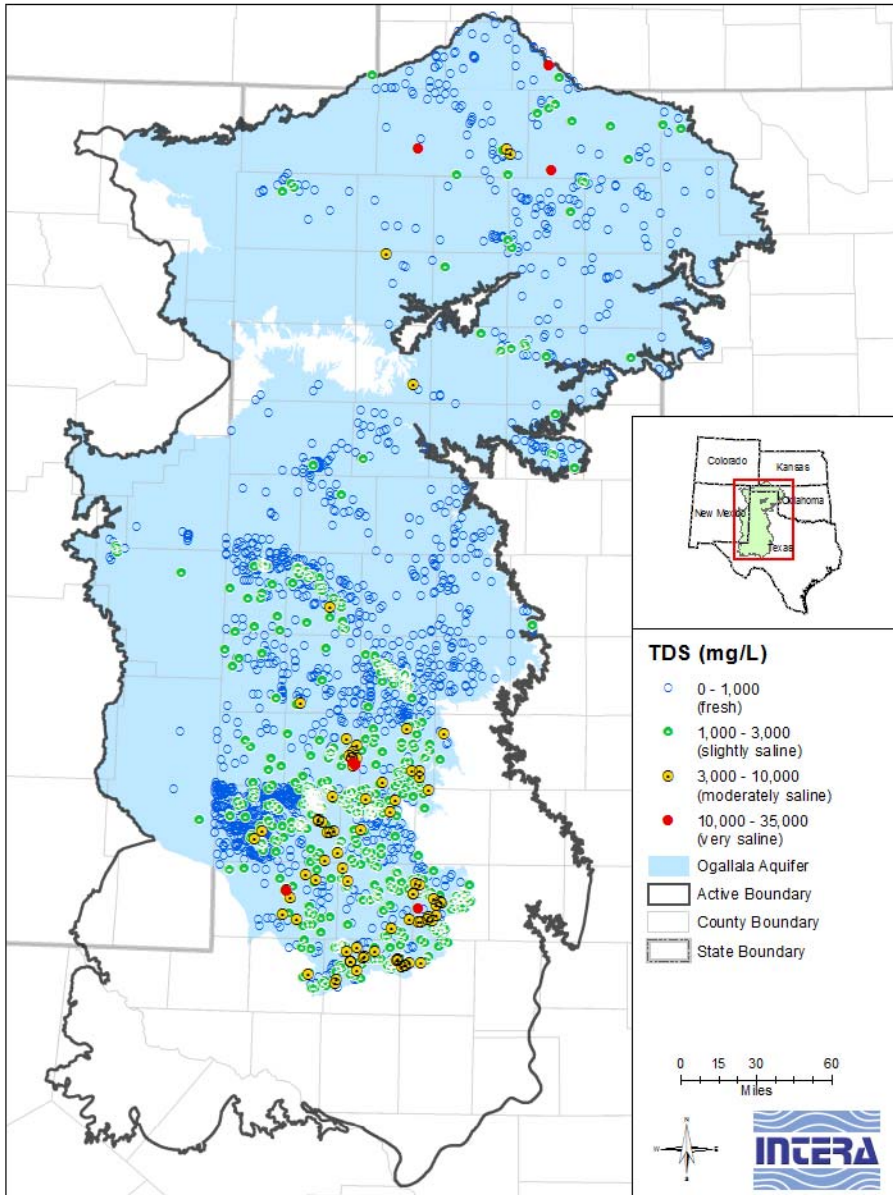


Conceptual Model


- During Pre-development: recharge balances discharge, no net change in groundwater storage
- During Post-development: Increased discharge from pumping, locally increased recharge from irrigation, overall reduction in natural discharge and GW storage
- Northern and Southern sections have different hydrostratigraphy and recharge patterns.

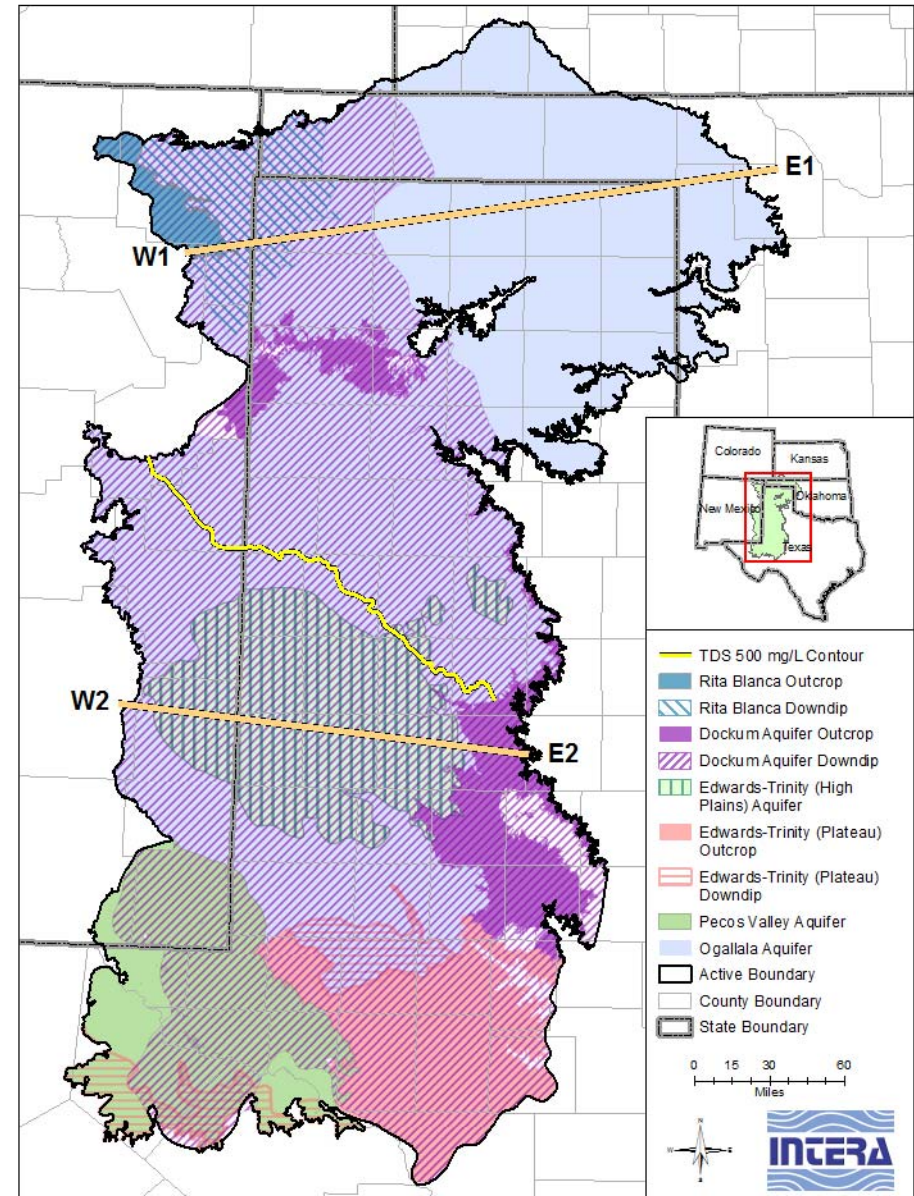

Conceptual Model

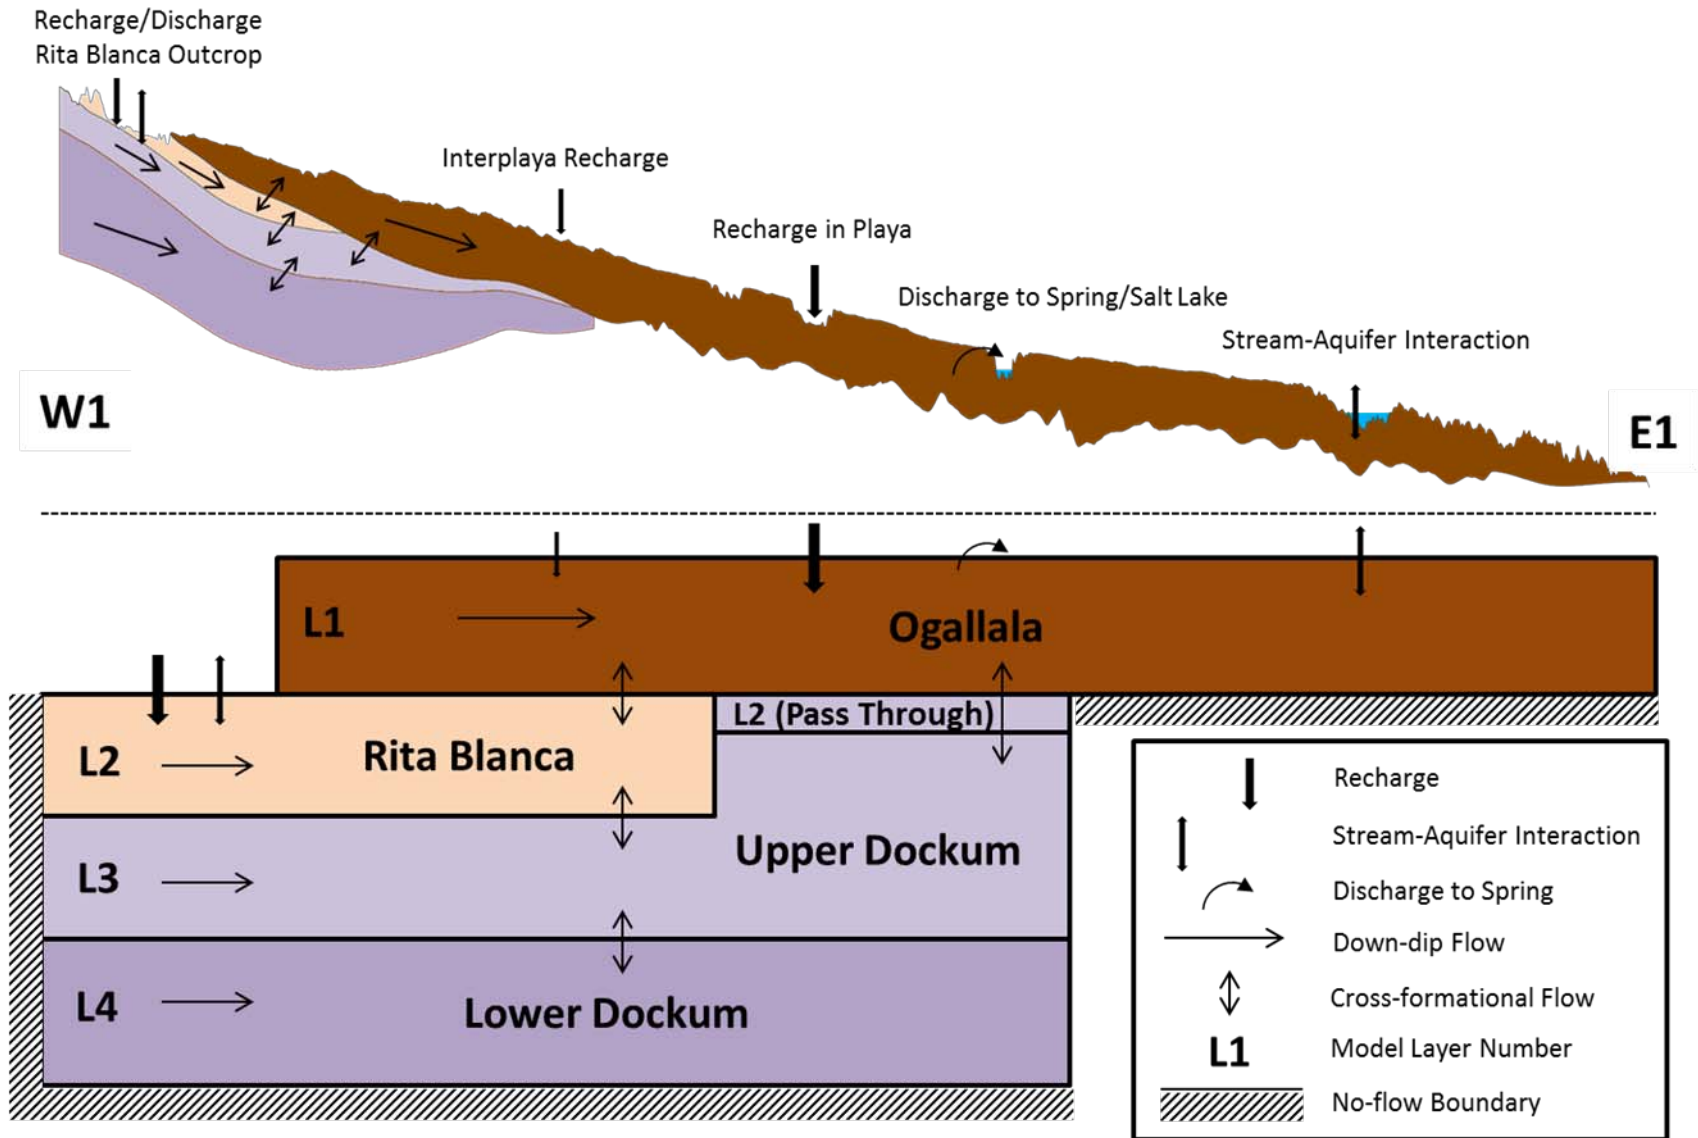

Conceptual Model

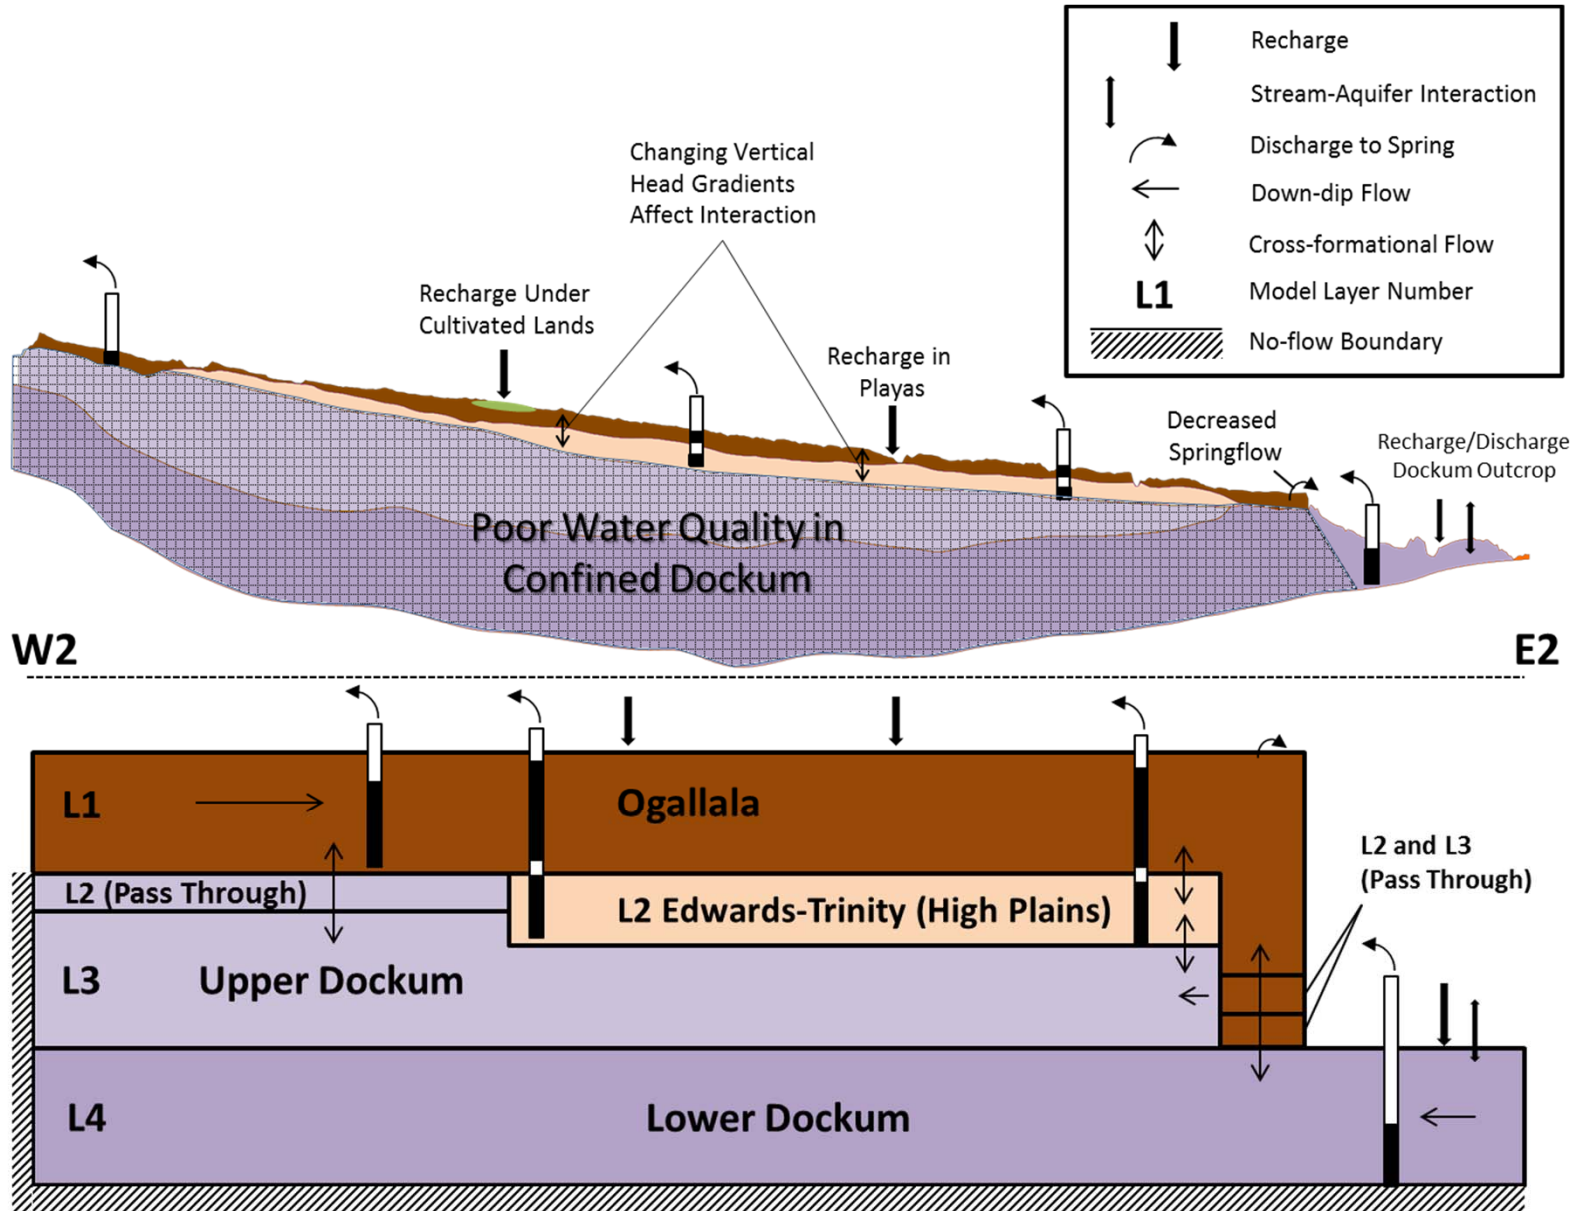

High Plains Aquifer System Conceptual Model Viewer

- Link: hpasgam.intera.com
- Web-based, works through browser
- Road and satellite basemaps
- Address finder
- Layer selector
- Aquifer Boundaries
- Surfaces
- Surface query tool
- Water level monitoring wells
 - Marker clustering (“drill down” to individual wells)
 - Time series water level plots
 - Time series saturated thickness (Ogallala only)

The application is in beta, and we need your feedback to make it better.

High Plains Aquifer System Groundwater Availability Model

Stakeholder Meeting #2, Amarillo, May 12, 2014

1. Q: What TDS concentration is used for the Dockum Aquifer boundary
A: 5,000 mg/L. 3,000 mg/L typically defines other aquifers in Texas
2. Q: What there are restriction to the types of geophysical logs that were used? CRMWA has logs that do not appear to have been considered in this study
A: INTERA will follow up with CRMWA.
3. Q: In the conceptual model report, “downdip” appears to be used interchangeably with “confined” or “subcrop”. Suggest using “downdip” to describe direction following the actual dip.
A: Nomenclature will be reviewed for consistency in the structure section.
4. Q: Is there recharge along the Canadian River in the Dockum? The Canadian is thought to be source of discharge.
A: We do conceptualize recharge as occurring in the Dockum outcrop in that area, although some of that recharge likely discharges locally to the Canadian
5. Q: How many geophysical logs were used to define the Rita Blanca?
A: Looking at the slide, it appears to be 15-20.
6. Q: Did the pump test data from the CRMWA wells affect the estimate of hydraulic conductivity in Roberts County?
A: It does affect the estimate locally, but the values were not significantly outside the range that had estimated in previous studies.
7. Q: Follow up. It appears that several of the more recent pump tests were not considered in the conceptual model.
A: INTERA will follow up with CRMWA.
8. Q: Will the data from the CRMWA wellfield be used to estimate specific yield?
A: Single well pump tests cannot be used to estimate specific yield
9. General discussion of recharge in Lynn County. Pumping in the 1950s drew down water levels, wells ran dry. Some of those wells have since recovered.
10. Please adjust pre-development and post-development legends so that the bins are the same color.
11. Comment on springs: In Dallam County, Buffalo Springs may emanate from the Rita Blanca instead of Ogallala/Dockum.
12. Q: Pumping in Roberts County appears low for 2010. CRMWA has meter data for their wellfield use for the past several years.
A: INTERA will follow up with CRMWA.
13. Comment: Demand based pumping estimates are often 10-20% higher than metered (or reported) data
14. Q: What is the source of recharge in the Dockum that creates east-southeast gradient in the northwest portion of the model (there is no outcrop evident there).

A: Either lateral flow from outcrop areas in New Mexico, or crossformational flow from overlying units (Rita Blanca or Ogallala).

15. Comment: Instead of “playa recharge” it may be more accurate to say “recharge around playas” since studies have shown that the clay fill in the playas does not allow significant infiltration.

16. Q: When will 2010 water-in-storage numbers be available for the new model?

A: They could be available early in 2015, when the transient model is completed in draft form.

17. Q: Does the conceptual model viewer show all wells with water level measurements?

A: No, the wells that are shown are from the TWDB groundwater database, and contain at least five historical measurements.

18. Q: Will the model be able to estimate impacts of water level change on springs?

A: We can calibrate to springs, only when they consist of a discrete feature and have good historical measurements. Otherwise they are treated more as potential sources for discharge, but are not a focus of calibration. So in most cases, the answer is no.

19. Q: Can this model be used at a local scale for particular well fields? Will the size of the model make it difficult to run?

20. A: The model will be too coarse for simulating day-to-day wellfield operations. That would require either a submodel, or a refined version of the model. We don't anticipate excessively long run times for the regional model, but the ability to run it will be dependent on the experience of the user.

NAME	AFFILIATION
Neil Deeds	INTERA
Steve Shumate	Panhandle Groundwater Conservation District
Ray Brady	Hemphill County Underground Water Conservation District
C. E. Williams	Panhandle Groundwater Conservation District
Dale Hallmark	North Plains Groundwater Conservation District
Steve Walthour	North Plains Groundwater Conservation District
Bob Harden	R. W. Harden & Associates
Janet Guthrie	Hemphill County Underground Water Conservation District
Ben Weinheimer	Texas Cattle Feeders Association
Cindy Cockerham	Sen. Seliger
Cindy Ridgeway	Texas Water Development Board
John Williams	Canadian River Municipal Water Authority/ Region A